	NAVIGATION SYSTEMS Table of Contents	Vol. 1	18-00-1
		REV 57, Apr 05/04	

CHAPTER 18 – NAVIGATION SYSTEMS

TABLE OF CONTENTS

	Page
TABLE OF CONTENTS	18-00
Table of Contents	18-00-1
INTRODUCTION	18-10
Introduction	18-10-1
FLIGHT MANAGEMENT SYSTEM	18-20
Flight Management System	18-20-1
System Circuit Breakers	18-20-4
GLOBAL POSITIONING SYSTEM	18-25
Global Positioning System	18-25-1
System Circuit Breakers	18-25-4
VHF NAVIGATION	18-30
VHF Navigation	18-30-1
System Circuit Breakers	18-30-8
AUTOMATIC DIRECTION FINDER	18-40
Automatic Direction Finder	18-40-1
System Circuit Breakers	18-40-6
DISTANCE MEASURING EQUIPMENT	18-50
Distance Measuring Equipment	18-50-1
System Circuit Breakers	18-50-6
AIR TRAFFIC CONTROL TRANSPONDER SYSTEM	18-60
Air Traffic Control Transponder System	18-60-1
Mode S Transponder (Flight ID) <0094>	18-60-5
System Circuit Breakers	18-60-8
TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM	18-70
Traffic Alert and Collision Avoidance System	18-70-1
Traffic Advisory	18-70-5
Resolution Advisory	18-70-5
Aural Warning	18-70-8
System Circuit Breakers	18-70-9
GROUND PROXIMITY WARNING SYSTEM	18-80
Enhanced Ground Proximity Warning System <0040>	18-80-1
Mode 1 - Excessive Descent Rate	18-80-1

	Flight Crew Operating Manual CSP A-013-008	
--	---	--



NAVIGATION SYSTEMS Table of Contents

Vol. 1

18-00-2

REV 57. Apr 05/04

Mode 2 - Excessive Terrain Closure Rate	18-80-1
Mode 3 - Altitude Loss After Take-off	18-80-2
Mode 4 - Unsafe Terrain Clearance	18-80-2
Mode 5 - Below Glideslope Alert	18-80-3
Mode 6 - Callouts	18-80-3
Mode 7 - Windshear Detection and Alerting	18-80-3
System Circuit Breakers	18-80-10

WEATHER RADAR SYSTEM	18-90
Weather Radar System	18-90-1
System Circuit Breakers	18-90-7

LIST OF ILLUSTRATIONS

FLIGHT MANAGEMENT SYSTEM	
Figure 18-20-1 FMS - Block Diagram	18-20-2
Figure 18-20-2 FMS CDU - Front Panel Layout <0024>	18-20-3

GLOBAL POSITIONING SYSTEM	
Figure 18-25-1 Global Positioning System	18-25-2
Figure 18-25-2 Multifunction Display (2) Pilot's and Copilot's Instrument Panels	18-25-3

VHF NAVIGATION	
Figure 18-30-1 VHF Navigation System - Block Diagram	18-30-2
Figure 18-30-2 VHF Navigation - Radio Tuning Unit	18-30-3
Figure 18-30-3 VHF Navigation	18-30-4
Figure 18-30-4 VHF Navigation - Bearing Source	18-30-5
Figure 18-30-5 VHF Navigation - Deviation/Source Indicator	18-30-6
Figure 18-30-6 VHF Navigation Vertical Deviation Flag	18-30-7

AUTOMATIC DIRECTION FINDER	
Figure 18-40-1 Automatic Direction Finder System Interface	18-40-2
Figure 18-40-2 Automatic Direction Finder ADF Key	18-40-3
Figure 18-40-3 Automatic Direction Finder	18-40-4
Figure 18-40-4 Automatic Direction Finder - Bearing Source	18-40-5

DISTANCE MEASURING EQUIPMENT	
Figure 18-50-1 Distance Measuring Equipment System Interface	18-50-2
Figure 18-50-2 Distance Measuring Equipment Radio Tuning Unit	18-50-3
Figure 18-50-3 Distance Measuring Equipment - Audio Control Panel and Indications	18-50-4
Figure 18-50-4 Distance Measuring Equipment - Multifunction Display	18-50-5

18-60-1	Air Traffic Control Transponder System - Controls	Figure 18-60-1
18-60-2	Air Traffic Control Transponder System -	Figure 18-60-2
18-60-2	Radio Tuning Unit	Figure 18-60-3
18-60-3	ATC Transponder Interface	Figure 18-60-4
18-60-4	Radio Tuning Unit - Top Level Page	Figure 18-60-5
18-60-4	Air Traffic Control Transponder System -	Figure 18-60-6
18-60-6	Flight Identification - RTU	Figure 18-60-7
18-60-7	Flight Identification - FMS	

TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM

18-70-1	Traffic Collision Avoidance System -	Figure 18-70-1
18-70-1	Threat Level and Data Tags	Figure 18-70-2
18-70-2	Traffic Collision Avoidance System Interface	Figure 18-70-3
18-70-3	Traffic Collision Avoidance System - Controls	Figure 18-70-4
18-70-4	Radio Tuning Unit	Figure 18-70-5
18-70-6	Traffic Collision Avoidance System - PFD Indications	Figure 18-70-6
18-70-7	Traffic Alert and Collision Avoidance System -	
18-70-7	MFD Indications	

GROUND PROXIMITY WARNING SYSTEM

18-80-1	Ground Proximity Warning System	Figure 18-80-1
18-80-5	Interface Diagram	Figure 18-80-2
18-80-6	Ground Proximity Warning System - Controls	Figure 18-80-3
18-80-7	Ground Proximity Warning System -	Figure 18-80-4
18-80-8	Ground Proximity Warning	Figure 18-80-6
18-80-8	System Status Page	
18-80-11	Ground Proximity Warning	
18-80-11	System Status Page <003>	

WEATHER RADAR SYSTEM

18-90-1	Weather Radar System	Figure 18-90-1
18-90-2	Weather Radar System Control Panel	Figure 18-90-2
18-90-3	Weather Radar System - MFD Indications	Figure 18-90-3
18-90-4	Weather Radar System - MFD Indications	Figure 18-90-4
18-90-6	Weather Radar System - MFD Indications	



NAVIGATION SYSTEMS
Table of Contents


Vol. 1

18-00-4

REV 57, Apr 05/04

THIS PAGE INTENTIONALLY LEFT BLANK

Flight Crew Operating Manual
CSP A-013-008

 CRJ <small>canada</small> Regional Jet	NAVIGATION SYSTEMS Introduction	Vol. 1	18-10-1
		REV 57, Apr 05/04	

1. INTRODUCTION

The aircraft is equipped with the following navigation systems:

- Flight Management System (FMS)
- Global Positioning System (GPS) <0047>
- VHF Navigation
- Automatic Direction Finder (ADF)
- Distance Measuring Equipment (DME)
- Air Traffic Control (ATC) Transponder System
- Traffic Alert and Collision Avoidance System (TCAS)
- Enhanced Ground Proximity Warning System (EGPWS) <0040>
- Weather Radar System

Two separate VHF systems are provided for radio navigation and are designed and installed so that the failure of one system does not prevent the operation of the other. Both systems are connected to the onside and cross-side flight compartment displays and controls.


The navigation receivers are tuned by two radio tuning units and navigation data is displayed on the primary flight displays (PFD's) and multifunctional displays (MFD's).

Frequency selection is accomplished through the two radio tuning units. In the event of a failure of one or both radio tuning units, radio communication and navigation can be controlled by the backup tuning unit.

Display control panels permit control over the multifunctional display formats, navigation source and bearing source display.


Audio monitoring is provided by three audio control panels.

	Flight Crew Operating Manual CSP A-013-008	
--	--	--

 CRJ <small>Regional Jet</small>	NAVIGATION SYSTEMS Introduction	Vol. 1	18-10-2
		REV 56, Jan 31/03	

THIS PAGE INTENTIONALLY LEFT BLANK

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Flight Management System	Vol. 1	18-20-1
		REV 57, Apr 05/04	

1. **FLIGHT MANAGEMENT SYSTEM**

The flight management system (FMS) is an integrated navigation system that provides worldwide point-to-point and great circle navigation. The FMS can be used for:

- NAV Sensor Control (VOR/DME, AHRS and GPS) <AHRS> <0047>
- Dead Reckoning (DR)
- N1 Thrust Settings and Computation
- Secondary Radio Tuning
- MFD Control Menus
- Lateral Flight Plan Point-to-Point Navigation
- Flight Parameter Computations
- Fuel and Time Predictions
- Lateral Steering Command Outputs (flight control systems)
- Vertical Steering advisories
- Non-precision approaches

The FMS consists of two flight management computers, located in the avionics compartment, and two control display units located in the center console. The flight management computers collect information from the navigation sensors and perform all computations, control and command functions. The control display units provides the pilot interface for data input and control functions, and provides display of functions, modes and flight data. Pictorial data is displayed on the multifunctional displays. <0024>


A data loader, installed on the forward bulkhead behind the galley, is used to transfer data to and from the FMS and maintenance diagnostic computer (MDC). <0018>

The system uses all available sensors and provides the pilot with control of which sensors are used in the position computation. If no sensor data is available, the system continues to estimate a dead reckoning position using heading and true airspeed.


NOTE

For complete FMS operating instructions, refer to the
FMS-4200 Pilot's Guide

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

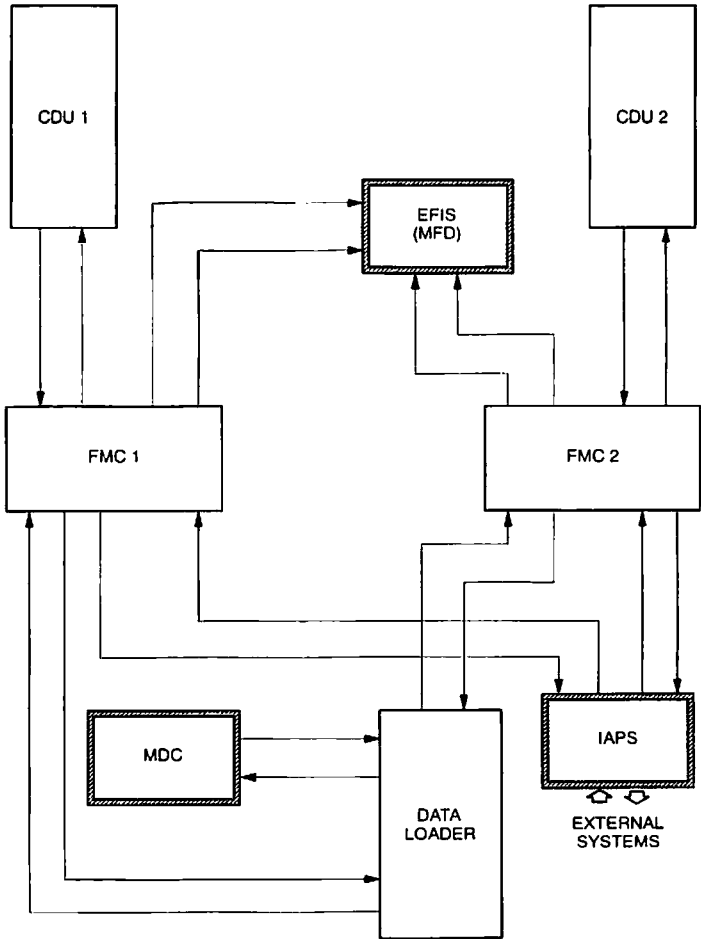

FMS – Block Diagram <0024>
Figure 18-20-1

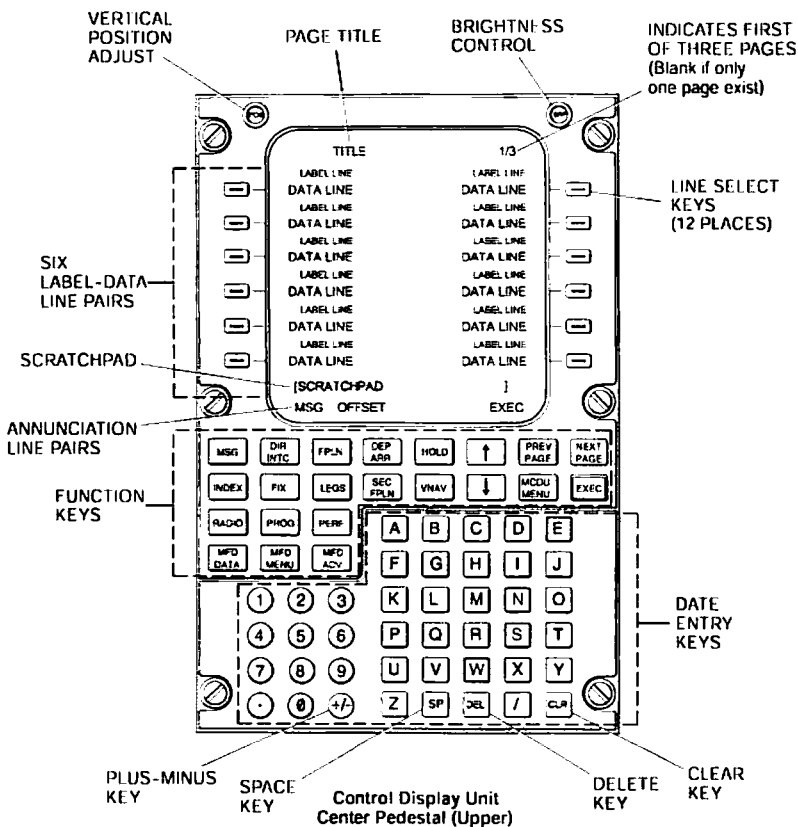


FMS CDU – Front Panel Layout «0024»
Figure 18-20-2

	NAVIGATION SYSTEMS Flight Management System	Vol. 1	18-20-4
		REV 56, Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Flight Management System (FMS)	Control Display Unit	CDU 1	DC BUS 1	1	H12	
		CDU 2	DC BUS 2	2	H12	<0024>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Global Positioning System	Vol. 1	18-25-1
		REV 57, Apr 05/04	

1. **GLOBAL POSITIONING SYSTEM**

The Global Positioning System (GPS) is a satellite navigation system that computes the position of the aircraft relative to orbiting satellites. The GPS provides highly accurate three-dimensional position, velocity and time information to the integrated avionics processor system (IAPS). The FMS control display units provides the pilots with access to GPS data and control settings. GPS information is displayed on the multifunctional displays.

The GPS consists of a receiver and antenna. The antenna supplies signals to the receiver which processes the signals and supplies continuous navigation updates to the inertial reference system (IRS) and to the flight management system (FMS). The FMS uses the GPS and other available navigation and position sensors to provide navigation, position information and guidance.

The GPS employs 24 satellites, with each satellite transmitting time and orbital position signals. The receiver decodes the signals and computes time, range, and position of the aircraft and other navigation parameters. The GPS satellites are controlled by a master control station in Colorado Springs, Colorado, USA. The receiver is a fifteen-channel unit that is capable of tracking up to twelve satellites but must track at least four satellites to measure the corresponding ranges.

The FMS control display unit provides the pilots with access to GPS data and control settings. GPS information is displayed on the multifunctional displays.

NOTE

Refer to the FMS-4200 Pilot's Guide for further information.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--




NAVIGATION SYSTEMS Global Positioning System


Vol. 1

18-25-2

REV 57, Apr 05/04

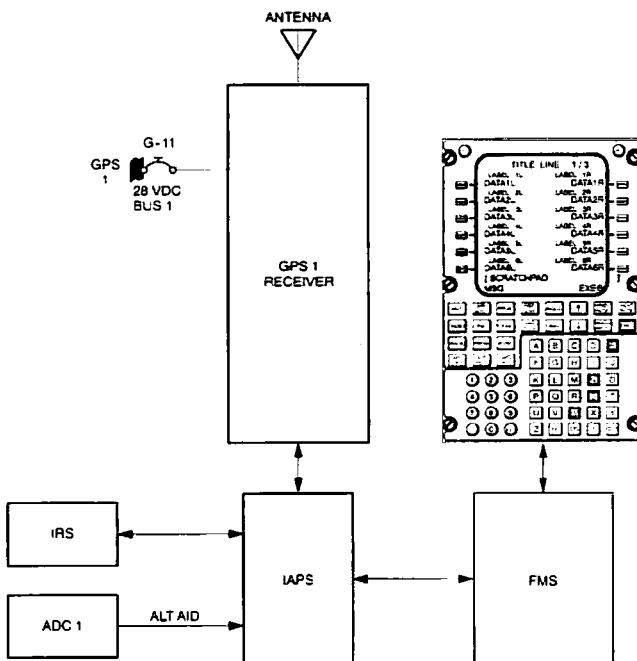

Global Positioning System <0025><0047>
Figure 18-25-1

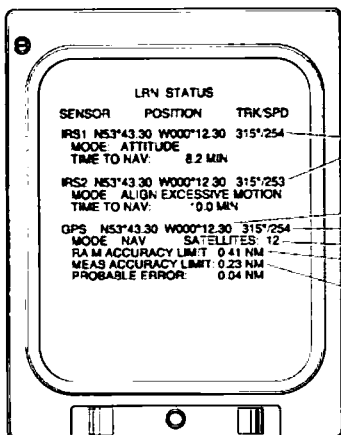

Multifunction Display

Status of other LRN equipment:
Dual IRS installation shown. Data displayed is dependent upon current mode of the navigation equipment.

GPS Status


- GPS Position (LAT/LONG).
- Track and speed (TRK/SPD).
- Mode of operation and number of satellites tracked.
- RAIM accuracy limit (also known as Horizontal Integrity Limit (HIL)).
- Measured accuracy limit (also known as Horizontal Uncertainty Limit (HUL)).

This page displays the position difference between each sensor (including GPS) and the FMS position estimate.

GPS Status


The position difference (POS DIFF) is in the format of radial / distance.

GPS use / availability (USE) by the FMS is indicated by either a YES, NO or DIS. YES indicates that the FMS is using that GPS information in the computation of its present position. NO indicates that the error between the calculated FMS position and the GPS source is too great and the FMS has chosen to disregard the input. DIS indicates that the crew has chosen to disable the inputs from the GPS.

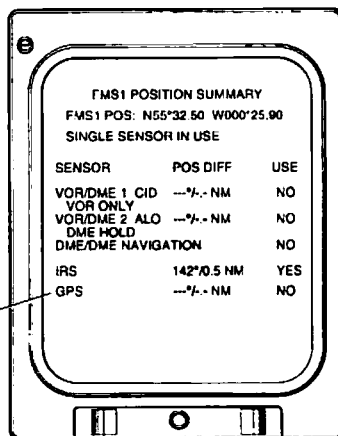

Multifunction Display


Multifunction Display (2) Pilot's and Copilot's Instrument Panels <0024><0025><0047>
Figure 18-25-2

	NAVIGATION SYSTEMS Global Positioning System	Vol. 1	18-25-4
		REV 57 Apr 05/04	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Global Positioning System	Receiver	GPS 1	DC BUS 1	1	G11	<0047>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS VHF Navigation	Vol. 1	18-30-1
		REV 56, Jan 31/03	

1. VHF NAVIGATION

There are two VHF navigation systems installed on the aircraft. The systems are identified as VHF/NAV 1 and VHF/NAV 2. The systems provide the following functions:

- VHF omnidirectional range (VOR)
- Localizer/glideslope (LOC/GS)
- Marker beacon (MB).

Frequency tuning and mode selection can be done by two radio tuning units, a single backup tuning unit or by the FMS control display unit. The radio tuning units (RTU's) are the primary radio communication system radio tuning source. (Refer to Chapter 5, Communications, for information on the radios and backup tuning unit).

The VOR/LOC receivers operate in the following frequency ranges:

- VOR frequencies - All even frequencies from 108.00 to 111.90 MHz and all frequencies from 112.00 to 117.95
- LOC frequencies - All odd frequencies from 108.10 to 111.95 MHz.


The NAV receivers monitor the selected VOR stations and provide enroute and terminal area navigation. The VOR data is displayed on the pilots and copilots PFD and MFD.

In LOC and GS modes, the NAV receivers supply final approach guidance data. Localizer signals are monitored for horizontal deviation and glideslope signals are monitored for vertical deviation. When the navigation receiver is tuned to a localizer frequency, the paired glideslope frequency is automatically tuned. The LOC/GS data is displayed on the pilots and copilots PFD and MFD.

The Marker Beacon (MB) system provides information on distance to the runway. The MB antennas receive signals from the outer, middle and inner MB ground transmitters. The signals are then supplied to the receivers. MB information is displayed on the pilots and copilots PFD. MB sensitivity can be adjusted at the radio tuning units.

The VHF/NAV system also supplies VOR/LOC and MB station identification to the audio integrating system.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--




NAV Frequency Readout (green)

NAV Key

Push key once to directly tune active frequency with tuning knobs.
Push key twice to select NAV main page.

MK-HI Indicator

Displayed when marker sensitivity is selected high.

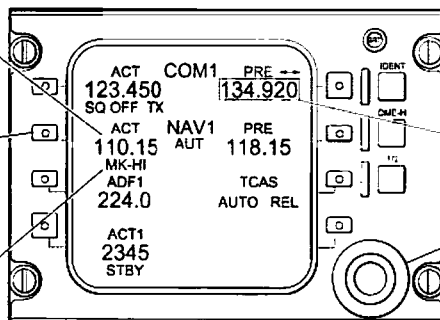

Radio Tuning Unit - Top Level Page
Center Pedestal

Tuning Window

Tuning Knob

NAV Frequency Readout (green)

PRE or RECALL


- PRE - Frequency was changed by tuning knobs.
- RECALL - Frequency was swapped with active frequency.

AUT Indicator

Displayed when automatic tuning of the navigation radios is selected on the FMS.

MKR SENS Key

Used to select marker sensitivity high or low. Selected setting is displayed in cyan.

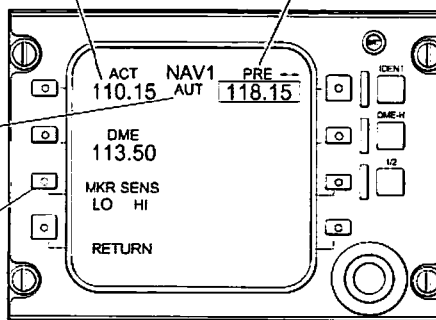

Radio Tuning Unit - NAV Main Page
Center Pedestal

VHF Navigation – Radio Tuning Unit <0012>-<0024>
Figure 18-30-2




NAVIGATION SYSTEMS VHF Navigation


Vol. 1

18-30-4

REV 57, Apr 05/04

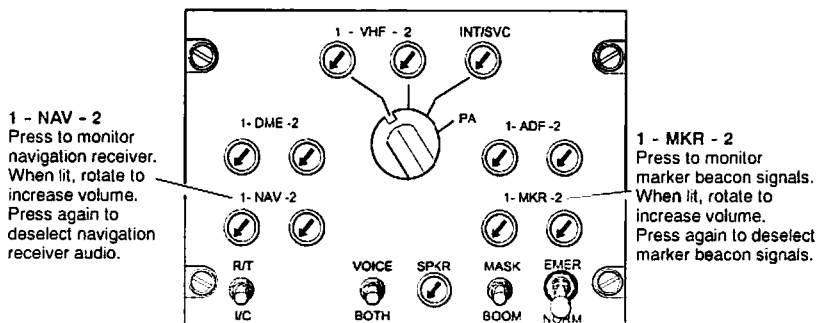


Audio Control Panel
Center Pedestal

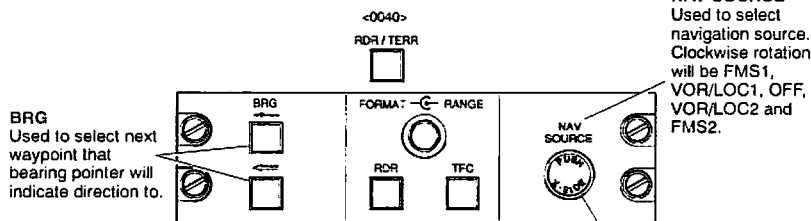

Display Control Panel
Pilot's and Copilot's Side Panels


VHF Navigation <0040>
Figure 18-30-3

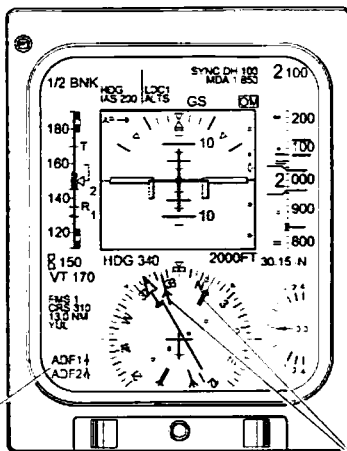

Primary Flight Display
Pilot's and Copilot's Instrument Panels



Bearing Source
Indicates navigation source selected to obtain bearings. Single lined (bearing #1) is magenta. Double lined (bearing #2) is cyan.

Bearing Pointers
Indicates direction of selected bearing. Single lined (bearing #1) is magenta. Double lined (bearing #2) is cyan.

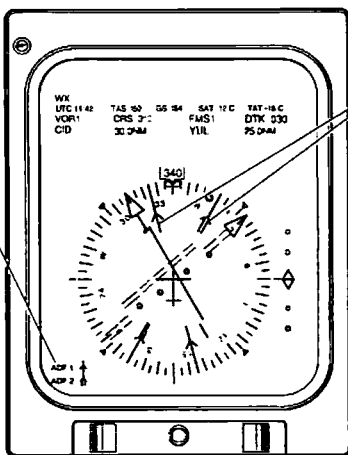

Multifunction Display - HSI Mode
Pilot's and Copilot's Instrument Panels

VHF Navigation - Bearing Source -0015-
Figure 18-30-4

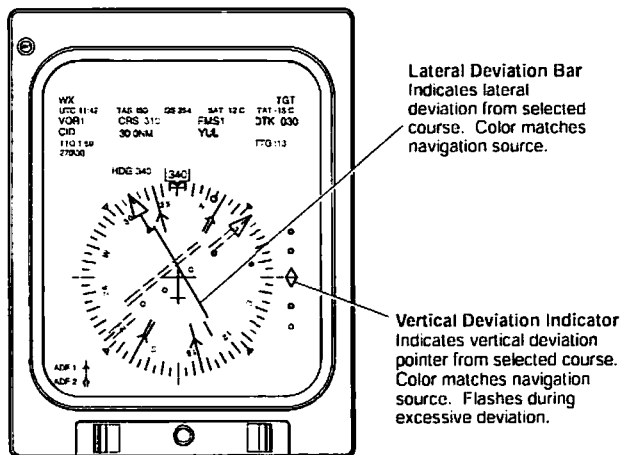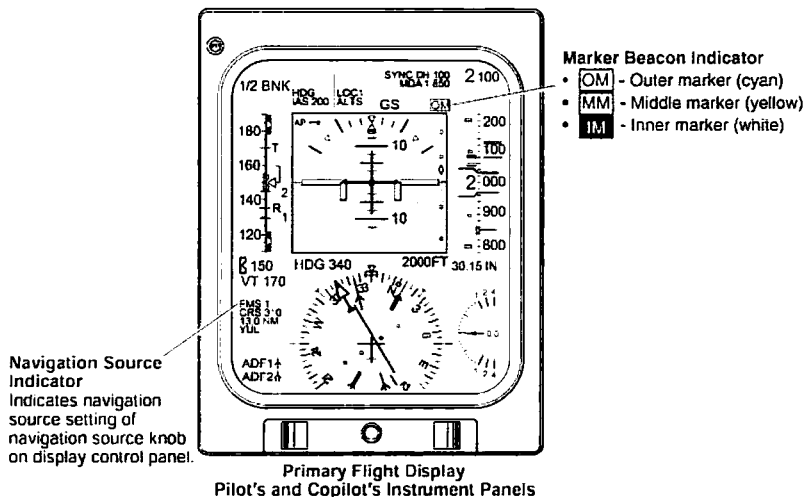


Multifunction Display - HSI Mode
Pilot's and Copilot's Instrument Panels

VHF Navigation - Deviation/Source Indicator <0015>
Figure 18-30-5

Vertical Deviation Flag (red)
Indicates a glideslope failure when ILS is the navigation source. Vertical deviation scale and pointer 6 are removed.


Lateral Deviation Flag (red)
Indicates a localizer failure when LOC is the navigation source.

Navigation Source Flag (red)
Indicates failure of the selected navigation source. Lateral deviation scale, lateral deviation bar and to/from indicator are removed.

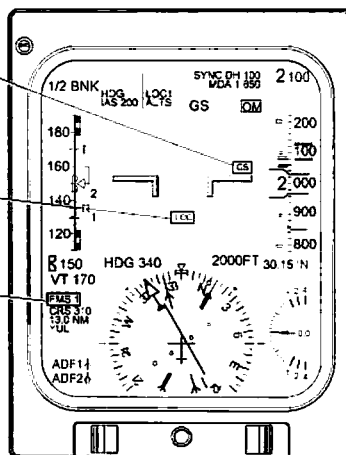

Primary Flight Display
Pilot's and Copilot's Instrument Panels


VHF Navigation Vertical Deviation Flag <0015>
Figure 18-30-6

	NAVIGATION SYSTEMS VHF Navigation	Vol. 1	18-30-8
		REV 56. Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
VHF Navigation	Receivers	VHF NAV 1	DC ESS	4	D6	
		VHF NAV 2	DC BUS 2	2	H9	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Automatic Direction Finder	Vol. 1	18-40-1
		REV 56, Jan 31/03	

1. **AUTOMATIC DIRECTION FINDER**

The automatic direction finder (ADF) system is a dual, low frequency radio system designated as ADF 1 and ADF 2. The ADF system is used to indicate relative bearing from the aircraft to a selected ground station.

The transmitting stations can be non-directional beacons (NDBs) or standard amplitude modulation (AM) broadcast stations in the frequency range of 190.0 to 1799.0 Khz. The receivers operate in the following modes:


- Antenna (ANT) mode - Functions as an aural receiver
- ADF mode - Functions as a direction finder indicating bearing to station and outputs an aural tone
- Tone mode - Allows identification of keyed continuous wave (CW) signals by using a 1000-Hz aural output circuit.

Frequency tuning and ADF mode selections is made through the radio tuning units. Station audio is controlled through the audio control panels.


Frequency tuning can also be made on the FMS control display unit. <0024>

Bearing selection is made on the pilot and copilot display control panels and the bearing-to-station data is displayed on the HSI portion of the pilots and copilots primary flight display (PFD) and on the multifunctional display (MFD), in HSI, navaid sector and present position map formats.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

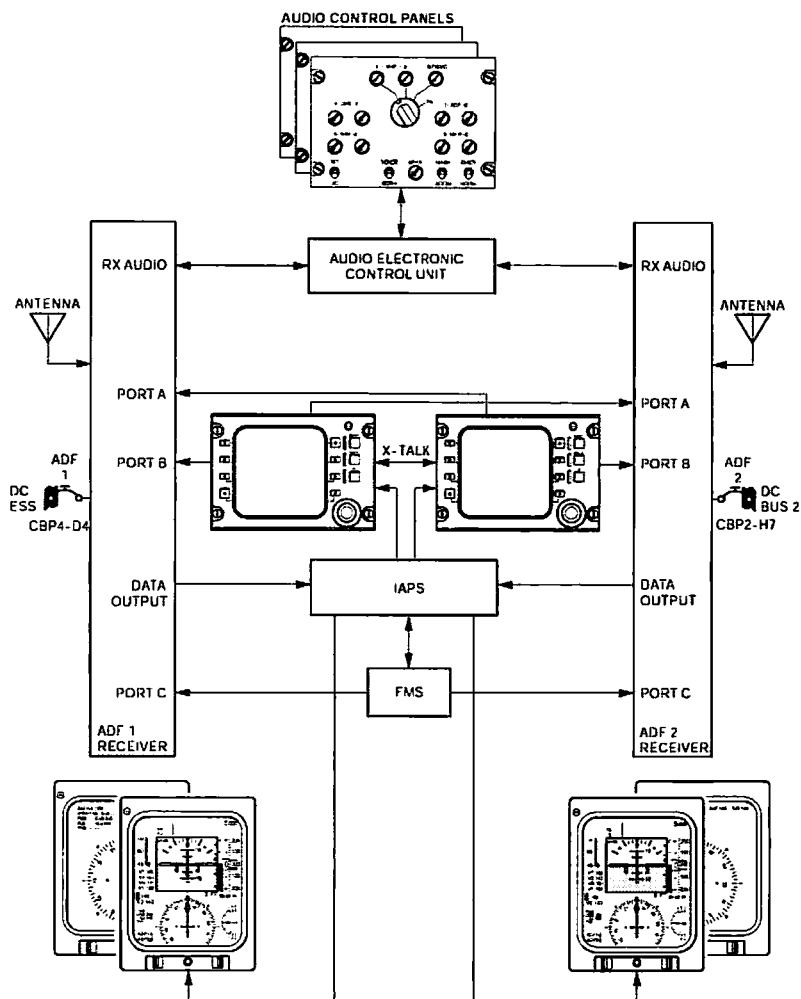


Automatic Direction Finder System Interface <0015><0024>
Figure 18-40-1

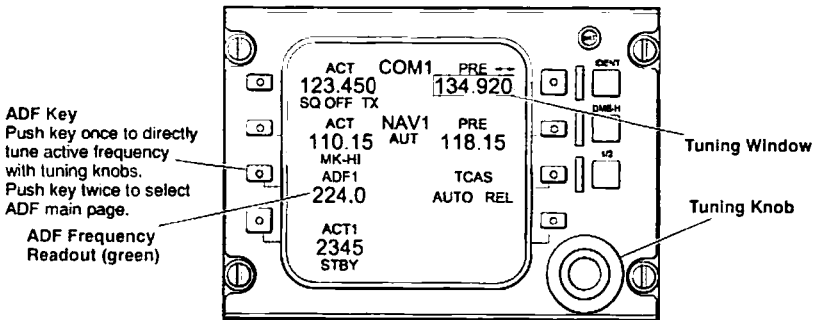

Radio Tuning Unit - Top Level Page
Center Pedestal

- ADF Mode Key**
Used to select either ADF or antenna functions. Selected setting is displayed in cyan.
- **ANT** - Used for range navigation, optimum station tuning, or monitoring commercial broadcast.
 - **ADF** - Used to select directional antenna. Bearing to selected station is displayed as a pointer on the HSI portion of the primary flight display and the multifunction display.

ADF Tone Key
Used to select tone circuit on or off. When selected on, an aural signal is superimposed on the unmodulated carrier wave to aid in precise frequency selection. Selected setting is displayed in cyan.

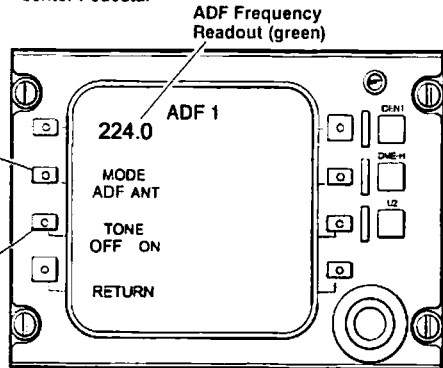


Radio Tuning Unit - ADF Main Page
Center Pedestal

Automatic Direction Finder ADF Key <0012><0024>
Figure 18-40-2




NAVIGATION SYSTEMS
Automatic Direction Finder

Vol. 1 18-40-4
REV 57, Apr 05/04

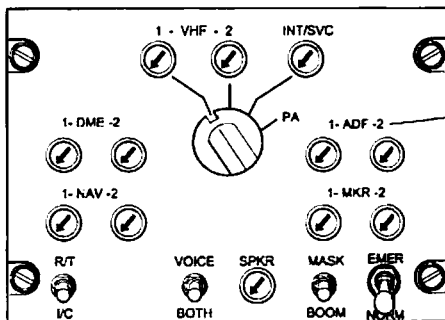


Audio Control Panel
Center Pedestal

1 - ADF - 2
Press to monitor selected
ADF receiver. When lit,
rotate to increase volume.
Press again to deselect
ADF receiver audio.

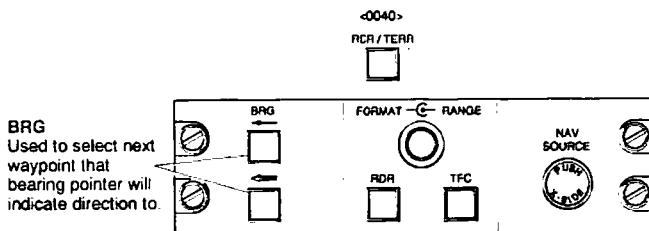

Display Control Panel
Pilot's and Copilot's Side Panels


Automatic Direction Finder <0040>
Figure 18-40-3

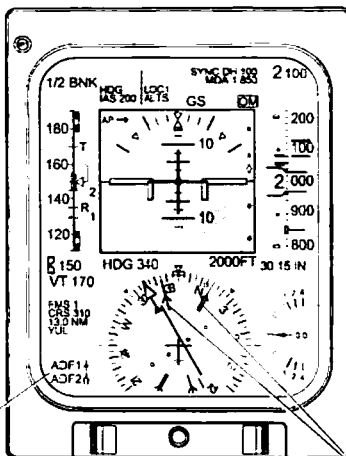

Primary Flight Display
Pilot's and Copilot's Instrument Panels


Bearing Source
Indicates navigation source selected to obtain bearings. Single lined (bearing #1) is magenta. Double lined (bearing #2) is cyan.

Bearing Pointers
Indicates direction of selected bearing. Single lined (bearing #1) is magenta. Double lined (bearing #2) is cyan.

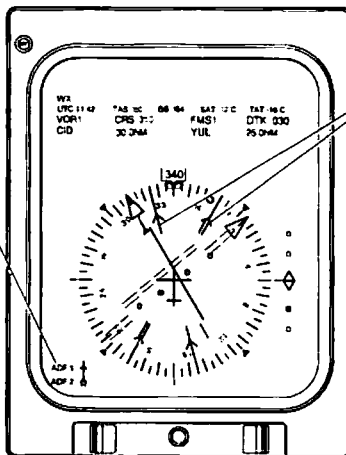

Multifunction Display - HSI Mode
Pilot's and Copilot's Instrument Panels


Automatic Direction Finder – Bearing Source <0015>
Figure 18-40-4

	NAVIGATION SYSTEMS Automatic Direction Finder	Vol. 1	18-40-6
		REV 56, Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Automatic Direction Finder	Receiver	ADF 1	DC ESS	4	D4	
		ADF 2	DC BUS 2	2	H7	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Distance Measuring Equipment	Vol. 1	18-50-1
		REV 56, Jan 31/03	

1. DISTANCE MEASURING EQUIPMENT

There are two identical distance measuring equipment (DME) systems installed in the aircraft. The DME system computes and displays the straight line distance between the aircraft and a selected DME ground station. The DME system also provides ground speed, time to station and station identification.

There are two DME transceivers installed in the avionics compartment that operate in the frequency range of 962 to 1213 MHz with a range of 300 nautical miles at 30,000 feet. Each transceiver has three channels and can track up to three stations simultaneously. Channel 1 of each DME is paired with the onsite VOR and can be manually tuned by either the radio tuning units, or backup tuning unit.


The DME transceiver is also tuned automatically by the FMS through the RTU. If Autotune is selected on the control display unit, the FMS will automatically tune VOR/DME channel 1.
<0024>

The DME transceivers interrogate the ground station at regular intervals. The ground station sends replies with a signal that is above or below the airborne DME frequency by 63 MHz. When a reply is received by the DME, it measures the elapsed time between the transmitted signal and the reply, then computes the slant distance, ground speed and time-to-go to the ground station.



The DME hold function splits the paired tuning between DME and VHF navigation systems to enable independent operation. The DME hold function holds the DME transceiver to the current VHF navigation frequency and permits the VHF navigation receiver to be independently tuned. The DME frequency can also be tuned independently while the VHF navigation receiver is kept at the current frequency.

Frequency tuning and DME hold selections are through the radio tuning units. The DME frequency channels are paired with the VHF navigation channels. The frequency selection is done with the pilot's or copilot's RTUs in the frequency range of 108.00 to 117.95 MHz. Station audio is monitored through the audio control panels. Visual indications of tuned stations, distance readouts and DME hold indications are provided on the primary flight displays and multifunctional displays.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

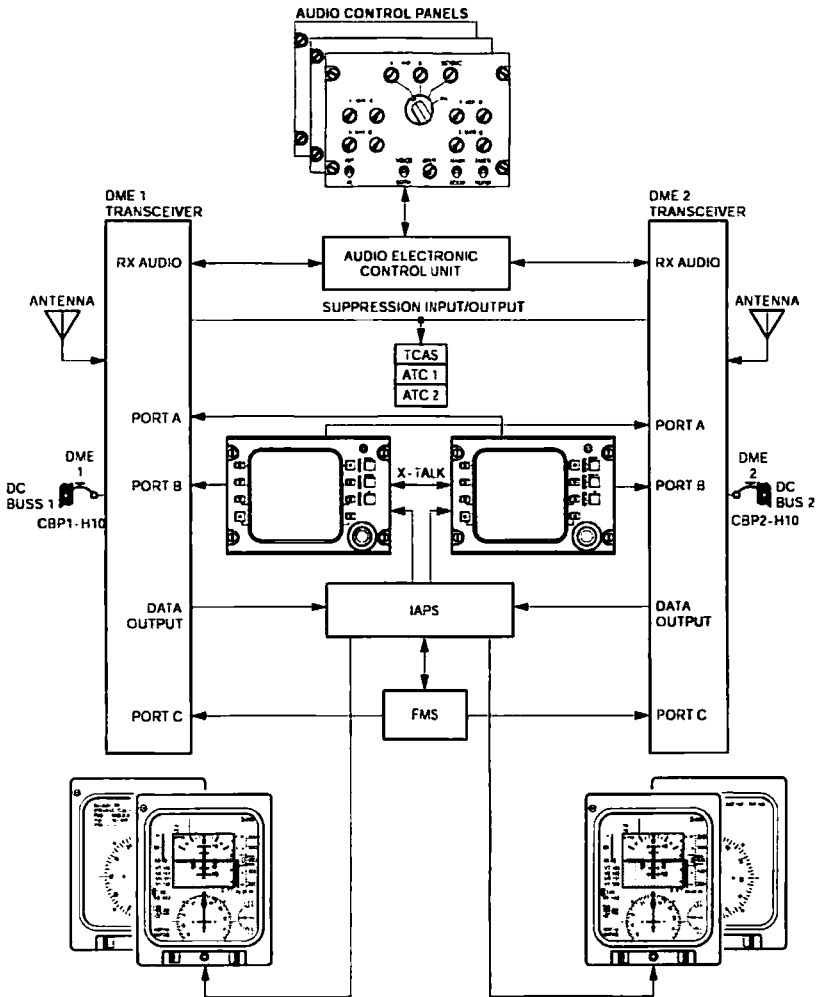


Distance Measuring Equipment System Interface <0015><0024>
Figure 18-50-1

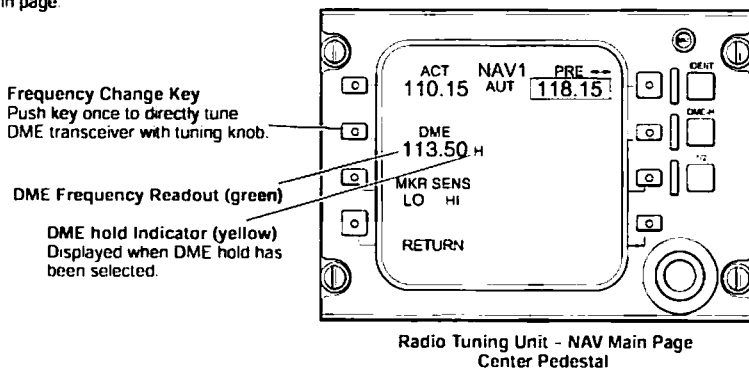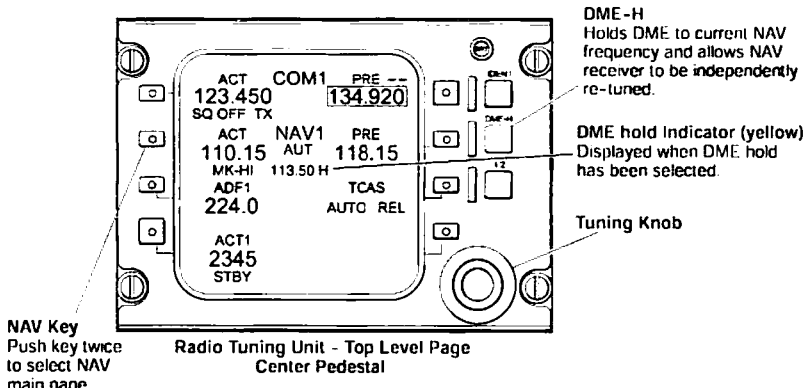


Distance Measuring Equipment Radio Tuning Unit <0012><0024>
Figure 18-50-2

Distance Measuring Equipment – Audio Control Panel and Indications <0015>
 Figure 18-50-3
 Primary Flight Display
 Pilots and Copilot's Instrument Panels

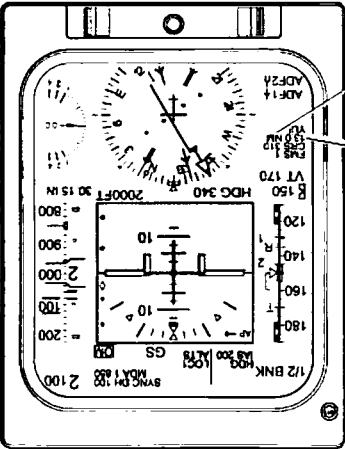


Distance Readout
 Indicates distance to tuned
 nautical miles. Color matches
 navigation source.
 When DME hold is selected,
 it replaces NM legend on distance
 readout. Not displayed if FMS is
 navigation source.

Audio Control Panel
 Center Pedestal

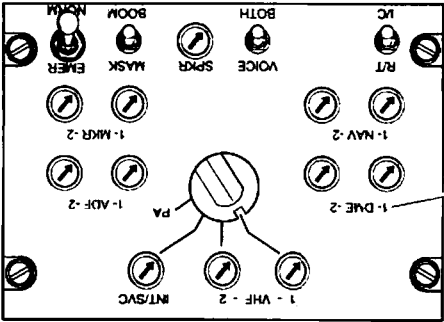


1 - DME - 2
 Press to monitor selected
 DME transceiver. When lit,
 rotate to increase volume.
 Press again to deselect
 DME station identification
 audio.

canadair REGIONAL <i>JET</i>	NAVIGATION SYSTEMS Distance Measuring Equipment	Vol. 1	18-50-5
		REV 56, Jan 31/03	

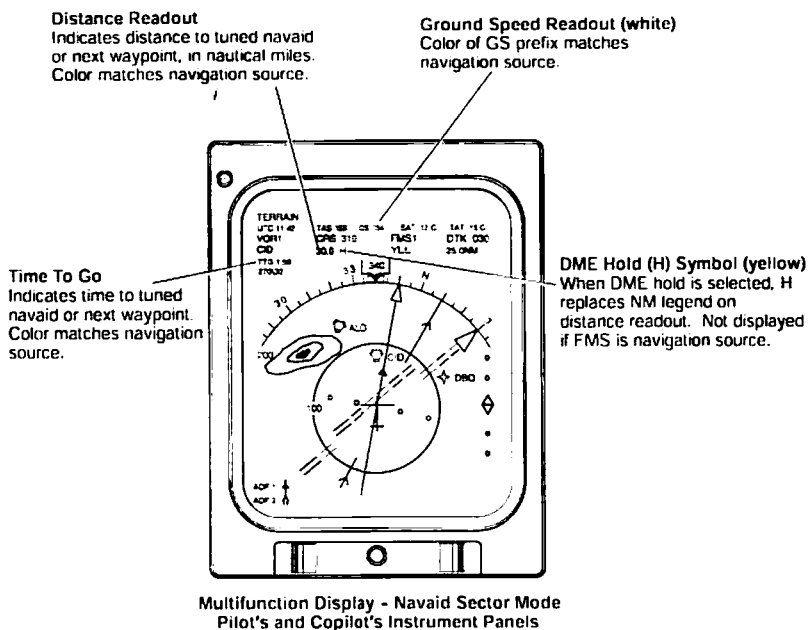

Distance Measuring Equipment – Multifunction Display
Figure 18-50-4


	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Distance Measuring Equipment	Vol. 1	18-50-6
		REV 56, Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Distance Measuring Equipment	Transceiver	DME 1	DC BUS 1	1	H10	
		DME 2	DC BUS 2	2	H10	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Air Traffic Control Transponder System	Vol. 1	18-60-1
		REV 56, Jan 31/03	

1. **AIR TRAFFIC CONTROL TRANSPONDER SYSTEM**

The two air traffic control transponders (ATC 1 and ATC 2) provide ground radar beacon systems with coded identification responses in the following modes:


- Mode A - Aircraft identify reporting
- Mode C - Altitude reporting
- Mode Select (S) - Data link with other mode S transponders for the traffic alert and collision avoidance system (TCAS).

Mode S data link includes air-to-air, ground-to-air (data uplink or comm A), air-to-ground (data downlink or comm B), and multisite (ground station to ground station) messages. The transponder code range is from 0000 to 7777, selectable through the RTU's.

ATC SEL

Used to select ATC transponders.

- 1 - ATC 1 transponder is activated and ATC 2 transponder is on standby.
- STBY - Both transponders are on standby.
- 2 - ATC 2 transponder is activated and ATC 1 transponder is on standby.

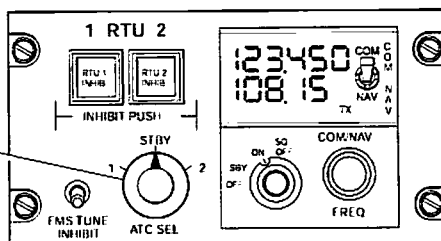


Backup Tuning Unit
Center Pedestal

Air Traffic Control Transponder System – Controls -0012>
Figure 18-60-1


Transponder codes are set on the top level page of the radio tuning units and can also be set using the FMS control display unit. ATC identification is selected using the IDENT button on the RTU.

Altitude reporting selection is made on the ATC main page of the radio tuning unit.


	Flight Crew Operating Manual CSP A-013-008	
--	---	--

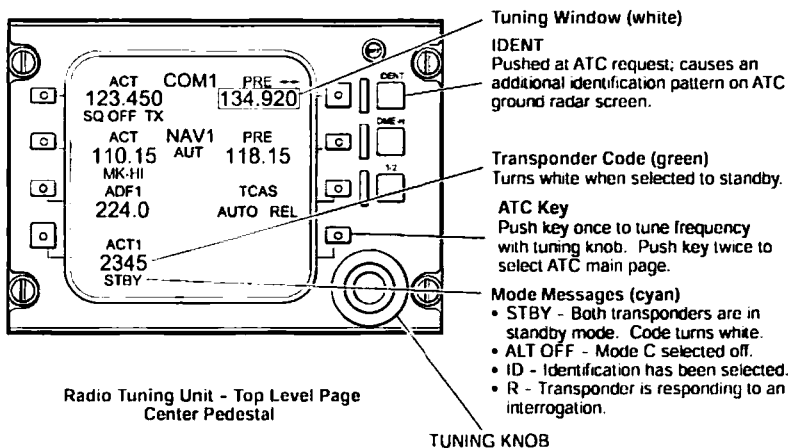


Air Traffic Control Transponder System – Radio Tuning Unit <0012><0024>
 Figure 18-60-2

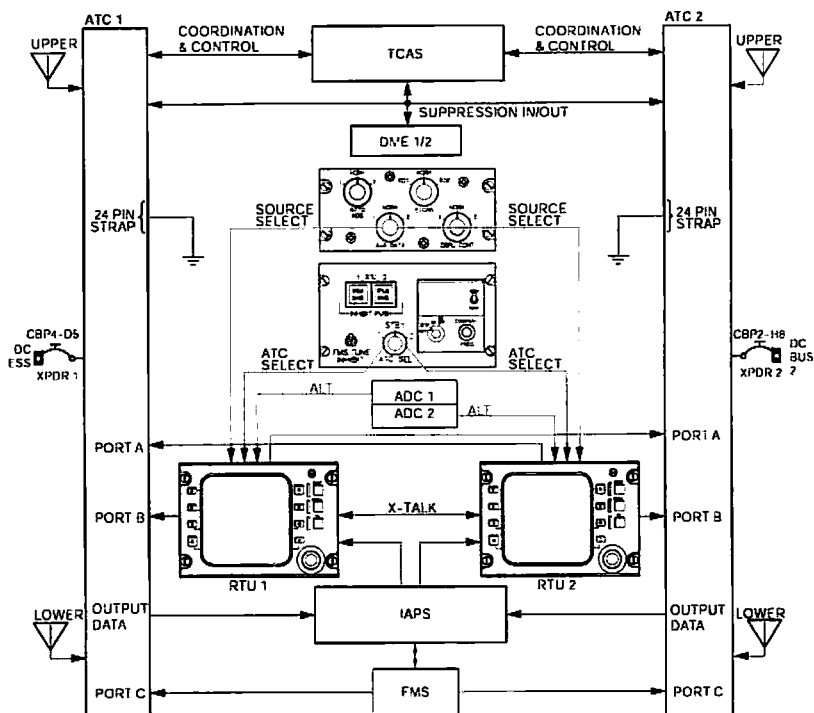


ATC Transponder Interface <002>
Figure 18-60-3

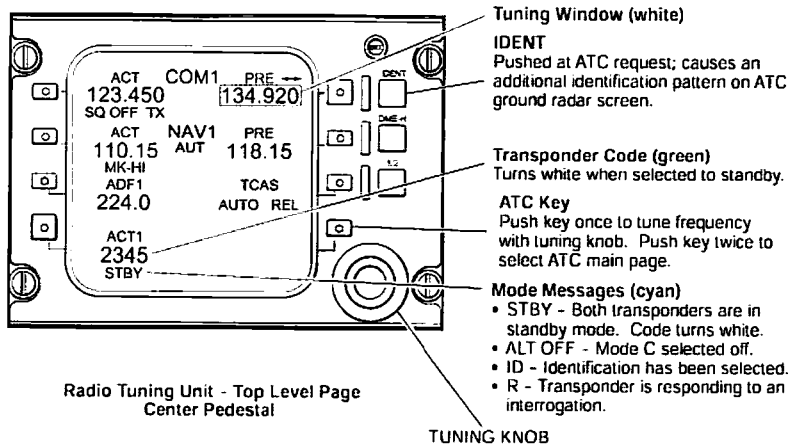

Radio Tuning Unit - Top Level Page <0012><0024>
Figure 18-60-4

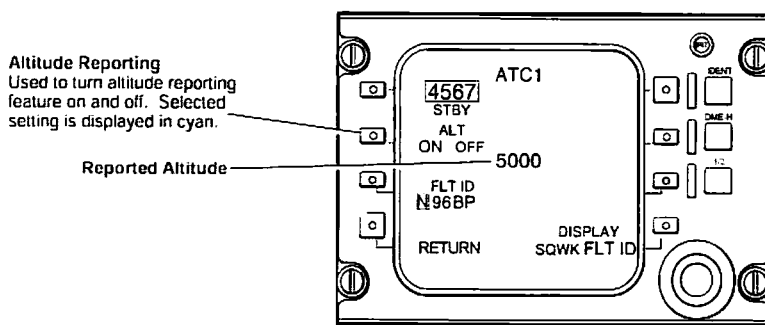

Radio Tuning Unit - ATC Main Page
Center Pedestal
Air Traffic Control Transponder System -
Radio Tuning Unit - ATC Main Page <0094>
Figure 18-60-5

	NAVIGATION SYSTEMS Air Traffic Control Transponder System	Vol. 1	18-60-5
		REV 56, Jan 31/03	

2. **MODE S TRANSPONDER (FLIGHT ID)** <0094>

Mode S also has the capability to display either a 4-digit squawk code or the flight identification (FLT ID) on line 4 of the RTU Top Level Page. Selection of either the squawk code or the FLT ID for display on the Top Level Page is made on the ATC Main Page.




To access the ATC Main Page from the Top Level Page, the ATC Line Select Key is pressed twice. Once the Main Page is displayed, the DISPLAY Line Select Key is pressed to select either the SQUAWK or FLT ID (the selected function will be displayed larger). The selected function is then displayed on line 3 of the Main Page, line 4 of the Top Level Page and on the FLT ID Page. To modify the squawk code or the FLT ID on the Top Level Page, the ATC Line Select Key is pressed, which will cause a tune window to surround the left character. The small Tuning Knob is then used to change the character displayed in the tune window. The RTU then waits 2 seconds after knob rotation stops before locking in the new character. Rotating the large tune knob cycles the tune window from character to character.

To access the FLIGHT ID Main Page from the ATC Main Page, the FLT ID key is pressed twice. On the FLIGHT ID Main Page, the RTU displays an Active and Preset Flight ID. By pressing the top right line-select key the ACTIVE and Preset FLT ID will swap when the tune window is on a Preset Flight ID character.



The FMS can also display the FLIGHT ID on the "RADIO TUNING PAGE" page 2 of 2, adjacent to the top right line select key on the CDU. To input the FLIGHT ID data:

- Press the top right line select key on the CDU so that the selection box highlights the FLIGHT ID information field.
- Input the FLT ID data, via the CDU keypad, where it will appear on the bottom left corner of the page (in brackets).
- After the FLT ID has been inputted, press the top right line select key and check that the proper FLT ID appears adjacent to the top right line select key.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

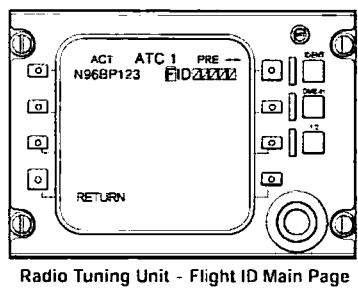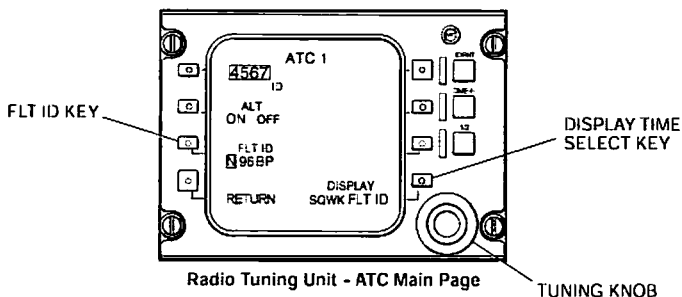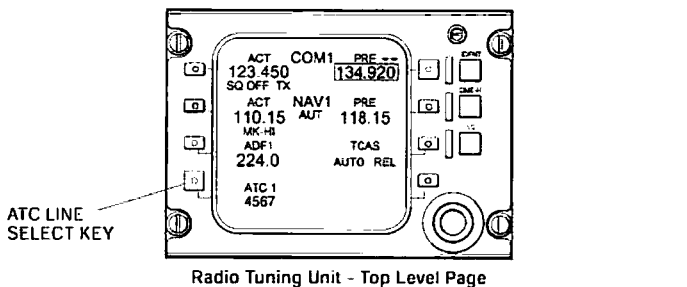


Flight Identification – RTU <0012><0024><0094>
Figure 18-60-6

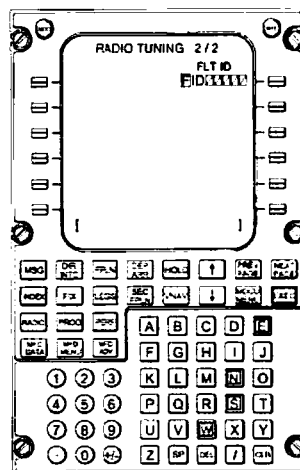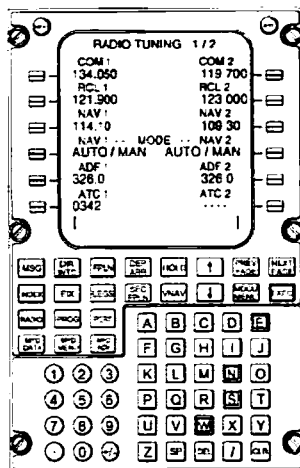

**CONTROL DISPLAY UNITS
WITH FLIGHT ID ACTIVATED**

Flight Identification – FMS <0012><0094>
Figure 18-60-7

	NAVIGATION SYSTEMS Air Traffic Control Transponder System	Vol. 1	18-60-8
		REV 56, Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Air Traffic Control	Transponder	XPDR 1	DC ESS	4	D5	
		XPDR 2	DC BUS 2	2	H8	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

1. TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM

The traffic alert and collision avoidance system (TCAS) is an airborne system that interrogates the air traffic control transponders of nearby aircraft to identify and display potential and predicted collision threats. TCAS surveillance range is up to 40 nautical miles and can detect and track up to 30 aircraft simultaneously. The system computes range, bearing and closure rates of other transponder equipped aircraft.





A mode "S" Transponder provides air-to-air communications for coordinating the resolution of maneuvers between TCAS equipped aircraft. The TCAS system provides no indication of traffic conflicts if the intruder aircraft is without an operative transponder.

TCAS provides symbology that depicts surrounding aircraft in terms of relative altitude, range, clock position, and vertical rate. The flight compartment displays also provide data on closure rates. The system displays four types of traffic.

The display control panels are used to activate TCAS and to set range display. Weather radar data can be overlaid on the multifunctional display, in TCAS mode.

TCAS mode and altitude format are displayed on the top level page of the radio tuning units. Testing and setting changes are made on the TCAS main page.

TCAS DISPLAY THREAT LEVELS AND DATA TAGS

SYMBOL	COLOR	THREAT LEVEL	THREAT LEVEL DEFINITION	CAUSE
	RED	Resolution Advisory (RA)	Intruding aircraft 25 seconds from closest point of approach	Intruding aircraft is above by least 500 feet per minute and descending at 100 feet and descending at
	AMBER	Traffic Advisory (TA)	Intruding aircraft 40 seconds from closest point of approach	Intruding aircraft level with and not climbing or descending
	CYAN	Proximate Traffic	Any traffic within surveillance range and ±1,200 feet vertical	Traffic below 1,200 feet and climbing at least 500 feet per minute
	CYAN	Other Traffic	Any traffic within TCAS range limit	Traffic above 2,700 feet and descending at least 500 feet per minute

Traffic Collision Avoidance System – Threat Level and Data Tags
Figure 18-70-1

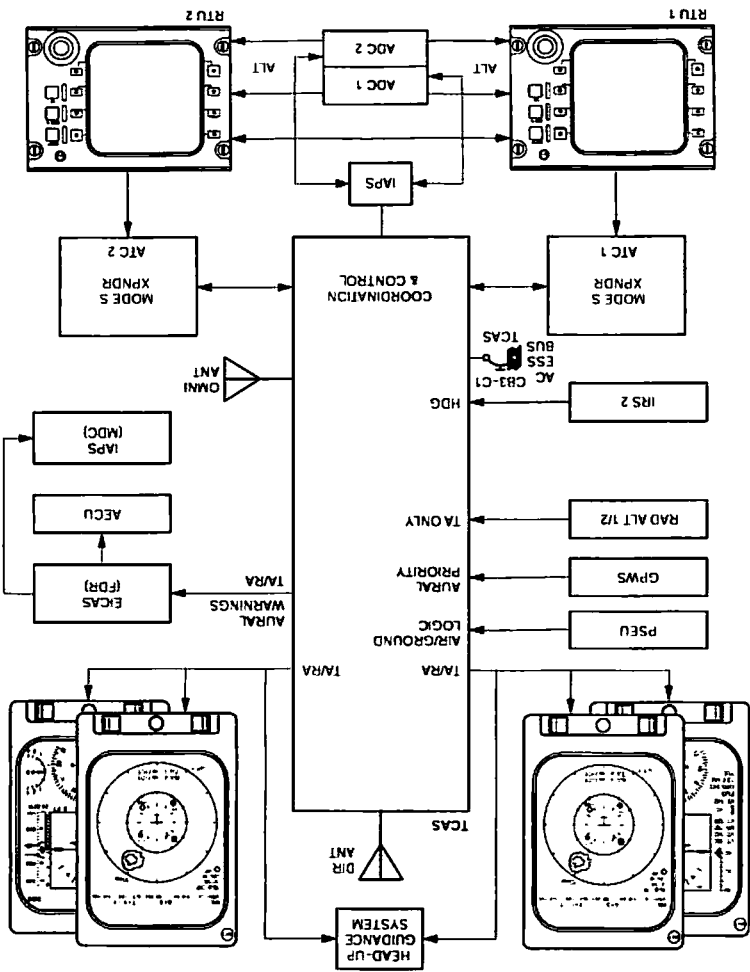

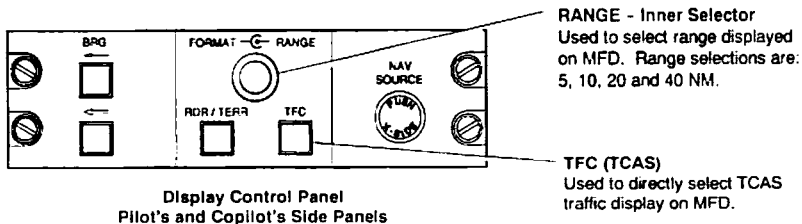



Figure 18-70-2
Traffic Collision Avoidance System Interface <0025><0026><0094>


 CRJ <small>regional jet</small>	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System	Vol. 1	18-70-3
		REV 57, Apr 05/04	



Traffic Collision Avoidance System – Controls <0040>
Figure 18-70-3

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System		Vol. 1	18-70-4 REV 56, Jan 31/03
---	--	--	---------------	--

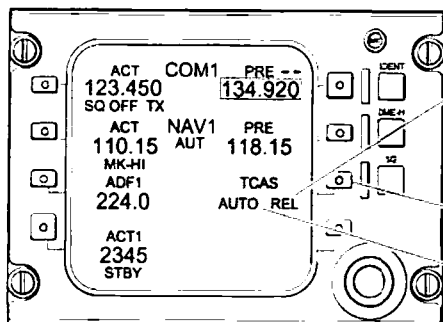

Altitude Format (cyan)
Displays the selected altitude format.
(relative or absolute)

TCAS Key
Used to select TCAS main page.


TCAS Mode (cyan)
Displays the selected TCAS mode.

Radio Tuning Unit - Top Level Page
Center Pedestal

Mode Selection

Used to select TCAS mode. Selected mode is displayed in cyan.

- **AUTO** - All advisories are displayed.
- **STBY** - All interrogations are inhibited.
- **TA ONLY** - Only traffic advisories are displayed.

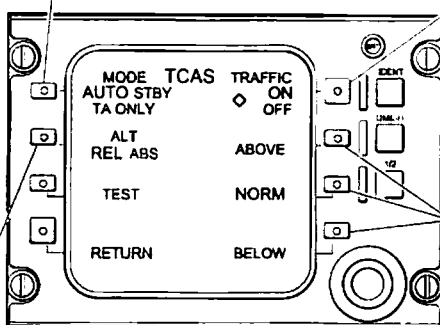

Traffic Selection
Used to select traffic display mode. Selected setting is displayed in cyan.

- **ON** - Displays all transponder traffic (advisory, proximate and others).
- **OFF** - Displays advisory traffic only.

Altitude Range
Used to select surveillance airspace relative to own air plane altitude. Selected setting is displayed in cyan.

- **ABOVE** - 9,900 feet above and 2,700 feet below.
- **NORM** - 2,700 feet above and below.
- **BELOW** - 2,700 feet above and 9,900 feet below.


Radio Tuning Unit - TCAS Main Page
Center Pedestal

Altitude Format

Used to select altitude format.

- **REL** - Relative to own airplane altitude.
- **ABS** - Absolute with respect to barometric altitude.

Traffic Collision Avoidance System - Radio Tuning Unit <0012><0024>
Figure 18-70-4

	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System	Vol. 1	18-70-5
		REV 56, Jan 31/03	

A. Traffic Advisory

The traffic advisory (TA) is issued to indicate the relative positions of intruding aircraft that are about 40 seconds from the closest point of approach.

Traffic advisories are displayed on the MFD (in TCAS mode) and shows the relative position of nearby ATC transponder equipped aircraft.

The traffic advisory allows the flight crew an opportunity to visually locate the intruding aircraft. The advisory is always displayed on the PFDs or can be displayed on the TCAS page of the MFD if selected from the display control panel.

TA ONLY (Traffic advisory only) will be displayed automatically when the aircraft is 1000 feet or below, and will revert to pre-selected mode automatically when the aircraft is above 1000 feet.

B. Resolution Advisory

Resolution advisories (RA) will direct the flight crew to resolve a threat by executing an aircraft maneuver that will increase separation. This occurs when the TCAS computer predicts that the intruding aircraft is within about 25 seconds from the closest point of approach.

Resolution advisories are displayed on the vertical speed indicator (VSI) portion of the PFD. The VSI shows the appropriate vertical maneuver to avoid the threat. The VSI provides vertical guidance to maintain safe vertical separation as follows:


- Corrective RAs - Fly from the red zone to the green zone
- Preventive RAs - Do not fly into the red zone.

The vertical maneuver is also accompanied by TCAS voice warnings.

NOTE

The TCAS resolution advisory programs are based on the pilot initiating the RA maneuver within approximately 5 seconds. If an additional corrective resolution advisory is issued (e.g. a reversal), the maneuver must be initiated within 2.5 seconds.


	Flight Crew Operating Manual CSP A-013-008	
--	---	--

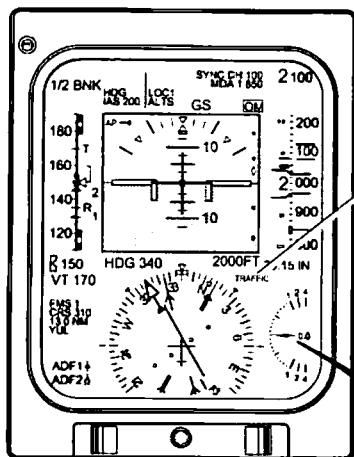

Primary Flight Display
Pilot's and Copilot's Instrument Panels

TCAS Message Area

- **TRAFFIC (red)** - Indicates TCAS resolution advisory (flashes for first 10 seconds).
- **TRAFFIC (amber)** - Indicates TCAS traffic advisory (flashes for first 10 seconds).
- **TCAS FAIL (amber)** - Indicates TCAS system failure.
- **TCAS RA FAIL (amber)** - Indicates PFD is unable to display TCAS resolution advisory.
- **TA ONLY (white)** - Indicates that TCAS has been selected to traffic advisory only mode, or has been automatically selected when the aircraft is below 1,000 feet. Flashes amber when traffic advisory is present.
- **TCAS OFF (white)** - Indicates that TCAS has been selected to standby mode.
- **TCAS TEST (white)** - Indicates that TCAS system is in test.



Resolution Advisory


Arc on vertical speed scale displays collision avoidance instructions.

- **Red band** - Range to be avoided.
- **Green band** - Target range or range to be maintained.

NOTE:

Vertical speed pointer and readout turn red when a TCAS resolution advisory is issued and speed is not within corrective limits.


Traffic Collision Avoidance System – PFD Indications <0015>
Figure 18-70-5

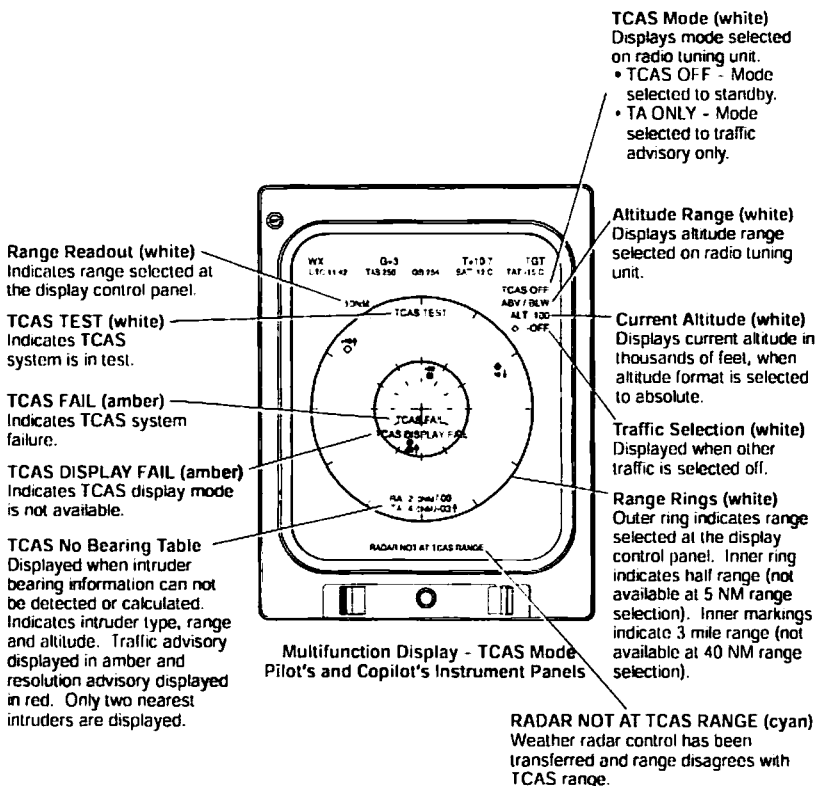

NOTES

1. Weather radar can be displayed on the MFD when in TCAS mode (range: 5, 10, 20 and 40 nm).
2. TCAS can be overlaid on any map display mode.
3. During an electrical transient, TCAS display range may default to 10 nm.

Traffic Alert and Collision Avoidance System – MFD Indications
Figure 18-70-6

	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System	Vol. 1	18-70-8
			REV 56, Jan 31/03

C. Aural Warning

The system provides appropriate aural warnings to the flight crew when the TCAS computer analysis of an aircraft signal predicts a penetration of TCAS protected airspace. The voice warnings cannot be cancelled or reduced in volume.


TA voice warning is TRAFFIC - TRAFFIC

RA voice warnings are:<0042>

- CLIMB, CLIMB, CLIMB
- DESCEND, DESCEND
- MONITOR VERTICAL SPEED
- CLIMB - CROSSING CLIMB, CLIMB - CROSSING CLIMB
- DESCEND - CROSSING DESCEND, DESCEND - CROSSING DESCEND
- INCREASE CLIMB, INCREASE CLIMB
- INCREASE DESCENT, INCREASE DESCENT
- CLIMB - CLIMB NOW, CLIMB - CLIMB NOW
- DESCEND - DESCEND NOW, DESCEND - DESCEND NOW
- MAINTAIN VERTICAL SPEED, MAINTAIN
- MAINTAIN VERTICAL SPEED, CROSSING MAINTAIN
- ADJUST VERTICAL SPEED, ADJUST

The clear advisory is "CLEAR OF CONFLICT".


	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System	Vol. 1	18-70-9
		REV 56, Jan 31/03	

D. System Circuit Breakers


SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Traffic Alert and Collision Avoidance System	Transmitter / Receiver	TCAS	AC ESS	3	C1	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Traffic Alert and Collision Avoidance System	Vol. 1	18-70-10
		REV 56, Jan 31/03	

THIS PAGE INTENTIONALLY LEFT BLANK

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-1
		REV 57, Apr 05/04	

2. **ENHANCED GROUND PROXIMITY WARNING SYSTEM** <0040>

The ground proximity warning system (GPWS) is used to help prevent accidents caused by unsafe flight maneuvers in proximity of terrain or severe windshear. GPWS provides the flight crew with aural alerts, messages and visual annunciations in the event that the boundaries of the following alerting envelopes are exceeded:

- Mode 1 Excessive descent rate
- Mode 2 Excessive terrain closure rate
- Mode 3 Altitude loss after take-off
- Mode 4 Unsafe terrain clearance
- Mode 5 Below glideslope alert
- Mode 6 Callouts (descent below minimums, altitude callouts and bank angle alert)
- Mode 7 Windshear detection and alerting

Radar or terrain information is displayed on the multifunctional displays by pressing the RDR / TERR button on the display control panel. <0040>

A. **Mode 1 - Excessive Descent Rate**

Mode 1 is used for the approach phase of flight and is independent of the aircraft configuration. Mode 1 alerts are generated when the aircraft has an excessive descent rate close to the terrain. Mode 1 has two boundaries. Penetration of the outer boundary activates the flashing GND PROX lights and generates a SINKRATE, SINKRATE aural alert. Penetrating the inner boundary activates the flashing PULL UP lights and the repeated WHOOP, WHOOP, PULL UP aural, until the inner warning boundary has been exited. <0040>

B. **Mode 2 - Excessive Terrain Closure Rate**

Mode 2 alerts are generated when the aircraft is closing with terrain at an excessive rate. Mode 2 has two sub-modes referred to as Mode 2A and Mode 2B. Mode 2A is active during climbout, cruise, and initial approach (flaps not in landing configuration and the aircraft is not on glideslope centerline). Penetrating the outer boundary activates the GND PROX lights and generates the TERRAIN, TERRAIN aural. Continued penetration of the envelope will activate the PULL UP lights and generate a repeated WHOOP, WHOOP PULL UP aural. <0040>

Upon leaving the PULL UP warning area, if terrain clearance continues to decrease, the TERRAIN aural will be generated until terrain clearance stops decreasing. The GND PROX lights will remain on until 300 feet of barometric altitude has been achieved, or 45 seconds has elapsed, or the GND PROX FLAP OVRD has been selected, or the flaps are in a landing configuration. <0040>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--



NAVIGATION SYSTEMS

Ground Proximity Warning System

Vol. 1

18-80-2

REV 57, Apr 05/04

Mode 2B is activated when flaps are in landing configuration, when making an ILS approach with glideslope and localizer deviation less than 2 dots, and for the first 60 seconds after take-off. Penetration of the Mode 2B boundary with either gear or flaps not in a landing configuration, activates the GND PROX lights and generates a TERRAIN, TERRAIN aural. If the aircraft continues to penetrate the boundary the PULL UP lights are activated and a WHOOP, WHOOP PULL UP aural is repeated until the warning envelope is exited. <0040>

If the aircraft penetrates the Mode 2B boundary with both gear and flaps in a landing configuration, the GND PROX lights are activated and a TERRAIN aural is repeated until the envelope is exited. <0040>

C. Mode 3 - Altitude Loss After Take-off

Mode 3 provides alerts when the aircraft loses a significant amount of altitude after take-off, or low altitude go-around with gear or flaps not in a landing configuration. The amount of altitude loss permitted before an alert is generated depends on the height of the aircraft above the terrain.

The alert activates the GND PROX lights and generates a DON'T SINK, DON'T SINK aural. The DON'T SINK, DON'T SINK aural is only repeated if the altitude loss continues. The GND PROX lights will go out once a positive rate of climb is achieved. <0040>


D. Mode 4 - Unsafe Terrain Clearance

Mode 4 provides alerts for insufficient terrain clearance with respect to phase of flight, configuration and speed. Mode 4 has three sub-modes referred to as Mode 4A, Mode 4B and Mode 4C.

Mode 4A is active during cruise and approach with the gear and flaps not in the landing configuration. The boundary for Mode 4A is 500 feet radio altitude and increases linearly with airspeed, to a maximum of 1000 feet radio altitude. If the envelope is penetrated at less than 190 knots, the GND PROX lights flash and the TOO LOW GEAR aural alert is generated. If the envelope is penetrated at more than 190 knots, the GND PROX lights flash and a TOO LOW TERRAIN aural alert is generated. <0040>

Mode 4B is active during cruise and approach, with gear down and flaps not in the landing configuration. The boundary for Mode 4B is 245 feet radio altitude and increases linearly with airspeed, to a maximum of 1000 feet radio altitude. If the envelope is penetrated at less than 159 knots, the GND PROX lights flash and the TOO LOW FLAPS aural is generated. The flight crew may override the TOO LOW FLAPS alert by selecting the GND PROX FLAP OVRD. If the envelope is penetrated at more than 159 knots, the GND PROX lights flash and the TOO LOW TERRAIN aural alert is generated. <0040>

Mode 4C is active during the take-off phase with either gear or flaps not in the landing configuration. Mode 4C alerts the pilot when the terrain is rising more steeply than the aircraft is climbing. Mode 4C is based upon a minimum terrain clearance floor, that increases with radio altitude. If the aircraft radio altitude decreases to the value of the minimum terrain clearance floor, the GND PROX lights flash and the TOO LOW TERRAIN aural is generated. <0040>

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-3
		REV 57, Apr 05/04	

The GND PROX lights will continue to flash until the alert envelope is exited. Subsequent alerts will only occur if the envelope penetration increases by 20%. <0040>

E. Mode 5 - Below Glideslope Alert

Mode 5 provides two levels of alerting during airplane descents below the glideslope on front course ILS approaches.

The first alert level occurs when the aircraft is more than 1.3 dots below the glideslope and is called a "soft" alert. The GND PROX lights flash and the GLIDESLOPE aural is generated at approximately one half the volume of other aurals. <0040>

The second alert level occurs when the aircraft is below 300 feet radio altitude and is more than 2 dots below the glideslope and is called a "hard" alert. The GND PROX lights flash and the GLIDESLOPE aural is generated at the normal aural volume. <0040>

The GND PROX lights will go out once the glideslope deviation is less than 1.3 dots. <0040>

Mode 5 can be inhibited by pushing either PULL UP / GND PROX light while the aircraft is below 2000 feet radio altitude. Modes 1 through 4 aurals have priority over Mode 5 aurals. <0040>

F. Mode 6 - Callouts

Mode 6 provides different combinations of programmable advisory callouts covering the following:

(1) Transition through DH

Radio altitude transition through the highest DH selected for display on either PFD prompts a minimums-type aural. The function is enabled between 1000 and 10 feet AGL. Barometric altitude transition through the highest MDA selected for display on either PFD also prompts a minimums-type aural. MDA callout generation is enabled once the corrected altitude exceeds the MDA value by 200 feet. If both DH and MDA have been selected, the callout will be generated based on DH. The landing gear must be down to activate the callouts. <0040>


(2) Altitude Callouts

The altitude callout function generates aurals for descent below predetermined altitudes. Altitude callouts are generated only once and are reset by ascending to 1000 feet, or in the event that a transition from approach mode to take-off mode occurs.

(3) Excessive Bank Angle Alerting <0040>

Excessive bank angle alerting is a function of roll angle with respect to altitude above ground level. Upon penetration of the alert envelope boundaries, the BANK ANGLE, BANK ANGLE aural is generated. The aural is issued once, and only repeated if the roll angle increases by 20%. <0040>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-4
		REV 57, Apr 05/04	

G. Mode 7 - Windshear Detection and Alerting

Mode 7 monitors for windshear conditions during take-off and final approach between radio altitudes of 10 to 1500 feet.

Windshear cautions and warnings are triggered for tail wind and down draft conditions. Windshear warnings generate a siren, a WINDSHEAR, WINDSHEAR, WINDSHEAR aural and a red WINDSHEAR warning on the primary flight displays (PFDs).

Windshear alerts are triggered for headwind and updraft conditions. Windshear alerts generate an amber WINDSHEAR alert on the PFDs.

Flight director command bars provide escape guidance automatically when a windshear warning occurs or when the TOGA (take-off/go-around) switch(s) on the thrust levers are pressed. Pitch limit indicators (alpha-margin indicators) will appear on both primary flight displays for a windshear warning or alert.


The autopilot is automatically disengaged two seconds after windshear warning (if the autopilot is not already disengaged). During those two seconds, the autopilot will follow the windshear escape guidance.

Windshear warnings take priority over all other aural alerts and warnings, except a stall warning.

NOTE

In the event of a momentary loss of AC electrical power, the TERRAIN FAIL status message may be displayed while the GPS satellites are reacquired (approximately 75 seconds) and the FMS aircraft position is re-entered. -0040-

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

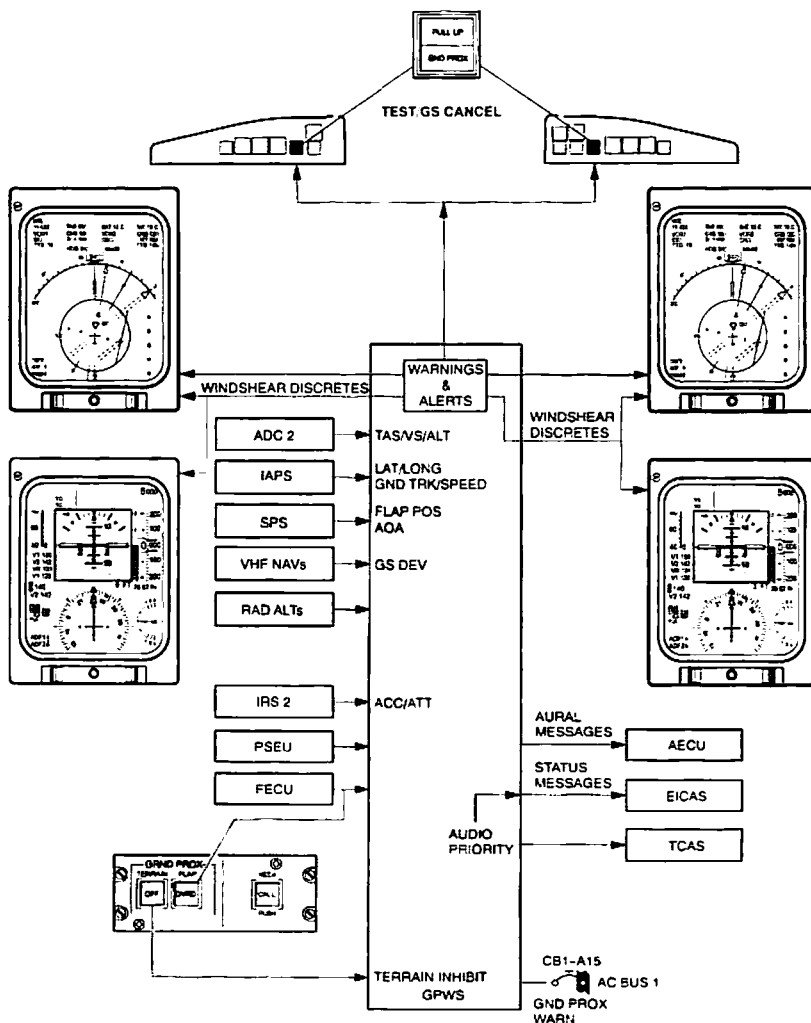

Ground Proximity Warning System Interface Diagram <0015><0025><0040>
Figure 18-80-1



NAVIGATION SYSTEMS
Ground Proximity Warning System


Vol. 1 18-80-6

REV 57, Apr 05/04

NOTE

The GRND PROX TERRAIN switch should be selected OFF when within 15nm of an airport that has no approved instrument approach procedures or an airport that is not in the GPWS database.

Ground Proximity Warning Panel
Centre Pedestal

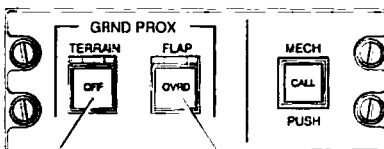

GRND PROX TERRAIN (Guarded)
Used to inhibit the terrain map display (terrain clearance floor and terrain / obstacle awareness alerting and display functions). Basic GPWS modes (1-6) and windshear mode (7) remain active.
• OFF light indicates inhibit is selected.

GRND PROX FLAP (Guarded)
Used to mute TOO LOW FLAPS or TERRAIN aural.
• OVRD light indicates override is selected.




PULL UP / GND PROX

PULL UP - Flashes (red) during ground proximity warnings. Will stop flashing when airplane has recovered from warning envelope.
GND PROX - Flashes (amber) during ground proximity cautionary alerts. Will stop flashing when airplane has recovered from the caution envelope. Switch is also used to initiate GPWS system test (on ground), or to provide the glideslope cancel function (when airborne).


Left and Right Glareshield


RDR / TERR
Used to select weather radar display, terrain display or both.

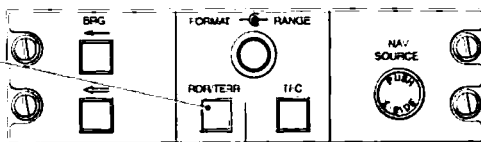

Display Control Panel
Pilot's and Copilot's Side Panels

Ground Proximity Warning System – Controls <0040>
Figure 18-80-2

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-7
		REV 57, Apr 05/04	

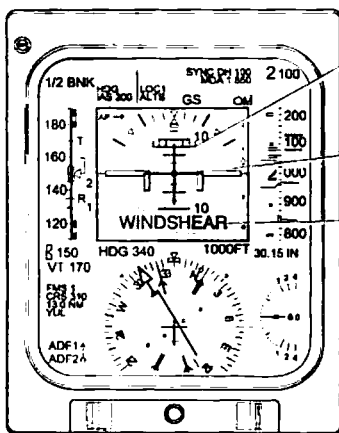

Primary Flight Display
Pilot's and Copilot's Instrument Panels

Pitch Limit Marker (amber)
(alpha-margin indicator)
Displayed during windshear warning or alert.
Comes on for a minimum of 60 seconds.
Displays amount of pitch attitude change that can be made before airplane reaches stall angle of attack.

Flight Director Command Bars (magenta)
Provide escape guidance during a windshear warning or when TOGA is selected on thrust levers.

Windshear Message
Flashes (amber) then comes on steady to indicate that the airplane is entering an increasing performance windshear condition.
Flashes (red) then comes on steady to indicate that a severe decreasing performance windshear condition has been encountered. Accompanied by aural warning.



(SIREN)
WINDSHEAR
WINDSHEAR
WINDSHEAR

Ground Proximity Warning System – Windshear Detection and Alerting <0015>
Figure 18-80-3

H. Terrain / Obstacle Awareness Alerting and Display <0040>

The terrain awareness alerting function uses airplane geographical position, aircraft altitude, and a terrain database to predict potential conflicts between the aircraft flight path and the terrain.

The terrain awareness alerting continuously computes terrain clearance envelopes ahead of the aircraft. Two envelopes are computed, one corresponding to a terrain caution alert level and one corresponding to a terrain warning alert level.

Terrain data is displayed on the multifunctional displays by pressing RDR / TERR on the display control panel. The terrain display can be overlaid on the multifunctional display in navaid sector and present position map formats. The terrain display is depicted as variable density dot patterns in green, yellow or red. The density and colour are a function of how close the terrain is relative to airplane altitude. When the conditions for either a terrain awareness caution or warning are detected, the terrain display automatically "pops-up" on both multifunctional displays and the range defaults to 10nm. Terrain more than 2000 feet below the airplane, or within 400 feet (vertical) of the nearest runway elevation is not displayed.

When the airplane penetrates the caution envelope boundary, the GND PROX lights flash and the CAUTION TERRAIN, CAUTION TERRAIN aural is generated. Terrain caution areas are shown in solid yellow on the terrain display.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--



NAVIGATION SYSTEMS Ground Proximity Warning System

Vol. 1

18-80-8

REV 57, Apr 05/04

When the aircraft penetrates the warning envelope boundary, the PULL UP lights flash and the TERRAIN, TERRAIN, PULL UP aural is generated. Terrain warning areas are shown in solid red on the terrain display.

An obstacle database is included within the terrain database. When an obstacle caution threat is detected the GND PROX lights flash and a CAUTION OBSTACLE, CAUTION OBSTACLE aural is generated. Obstacle cautions are shown in solid yellow on the terrain display. When an obstacle warning threat is detected the PULL UP lights flash and an OBSTACLE, OBSTACLE, PULL UP aural is generated. Obstacle warnings are shown in solid red on the terrain display.

Pending Rectification: <0025> <0040>

- *Airplanes equipped with IRS, but without GPS.*

NOTE

To avoid giving unwanted alerts, the terrain awareness alerting and display functions should be inhibited by selecting the GRND PROX, TERRAIN switch to OFF when within 15nm of approach or landing of an airport where there is a known problem with nuisance TOO LOW TERRAIN messages.

I. Peaks Display Mode <0040>


Peaks display mode is a customer option as an enhancement to the EGPWS terrain display and is enabled via a program pin on system installation.

Peaks mode allows terrain below the aircraft to be viewed on the terrain display during cruise flight. At altitudes safely above all terrain for the display range chosen, the terrain is displayed, independent of aircraft altitude, emphasizing the highest and lowest elevations to provide increased situational awareness in the event of unplanned descent or enroute deviation and for previewing terrain prior to decent.

Two elevation numbers indicating the highest and lowest terrain currently being displayed are overlaid on the display. The elevation numbers indicate terrain in hundreds of feet above sea level (MSL).

J. Terrain Clearance Floor <0040>

Terrain clearance floor is an increasing terrain clearance envelope around the nearest runway directly related to the distance from that runway. Terrain clearance floor alerts are based upon current airplane position, nearest runway centre point position, radio altitude, and a database of hard-surfaced runways whose length is greater than 3500 feet. Terrain clearance floor compliments Mode 4 alerts by covering insufficient terrain clearance even when in a landing configuration.

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-9
		REV 57, Apr 05/04	

Penetration of the alert envelope activates the GND PROX lights and generates a TOO LOW TERRAIN aural. The aural will occur once upon initial envelope penetration and one time thereafter for each 20% degradation in altitude. The GND PROX lights remain on until the aircraft exits the alert envelope.

	Flight Crew Operating Manual CSP A-013-008	
--	---	--



NAVIGATION SYSTEMS Ground Proximity Warning System


Vol. 1

18-80-10

REV 57, Apr 05/04

Terrain Display Annunciations

- TERRAIN (cyan) - Terrain display has been selected.
- TERRAIN TEST (cyan)- GPWS is in self test.
- TERRAIN NOT AVAIL (white) - Terrain has been selected for display but the estimated navigation accuracy is insufficient.
- TERRAIN OFF (white)- Terrain has been selected for display but terrain functions have been manually inhibited.

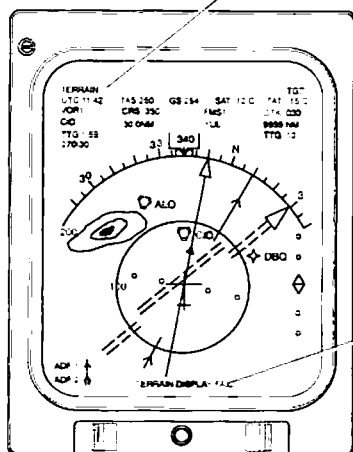

TERRAIN DISPLAY FAIL (amber)

Terrain has been selected for display and the required data is either failed, missing, or invalid.

TERRAIN RANGE XXX NM (amber)

Terrain range disagrees with display control panel range.

Multifunction Display - Navaid Sector Mode
Pilot's and Copilot's Instrument Panels

Ground Proximity Warning System Terrain Display <0040>
Figure 18-80-4



NAVIGATION SYSTEMS
Ground Proximity Warning System


Vol. 1 18-80-11

REV 57, Apr 05/04

GPWS FAIL status (white)
Indicates a failure in the basic ground proximity warning modes.

GS CANCEL status (white)
Indicates that glideslope Mode 5 alerts have been inhibited.

WINDSHEAR FAIL status (white)
Comes on to indicate a failure in the windshear detection system.

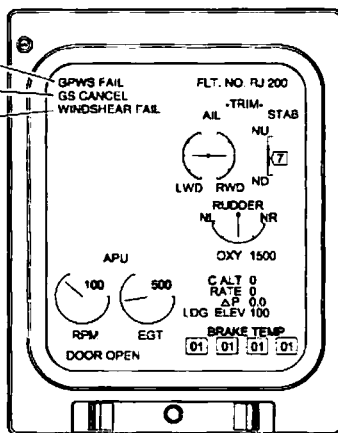

Status Page

Ground Proximity Warning System Status Page
Figure 18-80-5



NAVIGATION SYSTEMS
Ground Proximity Warning System

Vol. 1

18-80-12

REV 57, Apr 05/04

WINDSHEAR FAIL status (white)
Indicates a failure in the windshear detection system.

GPWS FAIL status (white)
Indicates a failure in the basic ground proximity warning modes.


GS CANCEL status (white)
Indicates that glideslope Mode 5 alerts have been inhibited.

TERRAIN FAIL status (white)
Indicates a failure in the terrain map display.

TERRAIN OFF status (white)
Indicates that the terrain map display has been selected and the terrain functions have been inhibited.


TERRAIN NOT AVAIL status (white)
Indicates that the terrain map display is not available due to position inaccuracy.

WINDSHEAR FAIL status (white)
Comes on to indicate a failure in the windshear detection system.

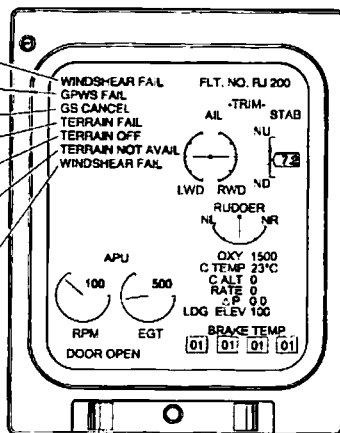

Status Page

Ground Proximity Warning System Status Page <0039><0040>
Figure 18-80-6

	NAVIGATION SYSTEMS Ground Proximity Warning System	Vol. 1	18-80-13
		REV 57, Apr 05/04	

K. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Ground Proximity Warning System	Computer	GND PROX WARN	AC BUS 1	1	A15	

	Flight Crew Operating Manual CSP A-013-008	
--	---	--



NAVIGATION SYSTEMS
Ground Proximity Warning System


Vol. 1

18-80-14

REV 57. Apr 05/04

THIS PAGE INTENTIONALLY LEFT BLANK

Flight Crew Operating Manual
CSP A-013-008

	NAVIGATION SYSTEMS Weather Radar System	Vol. 1	18-90-1
		REV 56, Jan 31/03	

1. WEATHER RADAR SYSTEM

The weather radar system provides the flight crew with X-band color display of radar detectable precipitation and ground mapping along the aircraft's flight path. System range is up to 320 nautical miles and up to 60 degrees on either side of the aircraft's flight path. The weather radar control panel provides control of the following:

- System modes - Weather, ground map and hold
- Receiver gain control (± 18 dB) and gain calibration
- Antenna azimuth scan angle (either $\pm 60^\circ$ or $\pm 30^\circ$)
- Antenna elevation control ($\pm 15^\circ$) in either automatic tilt or manual tilt (0.25° increments)
- Antenna pitch and roll stabilization.

The display control panel is used to select the weather radar format on the multifunctional displays (MFDs). The weather radar data can also be overlaid in navaid sector, present position map and TCAS modes.

Split scan operation enables both pilots to control the radar display on their respective MFDs. Each side will operate independently, except that either pilot can control the sector scan of both displays. In split scan operation, the clockwise sweep of the antenna updates the pilot's display and the counterclockwise sweep updates the copilot's display. If one side is turned off, the system reverts to single scan operation. <0028>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--




NAVIGATION SYSTEMS Weather Radar System


Vol. 1

18-90-2


REV 57, Apr 05/04

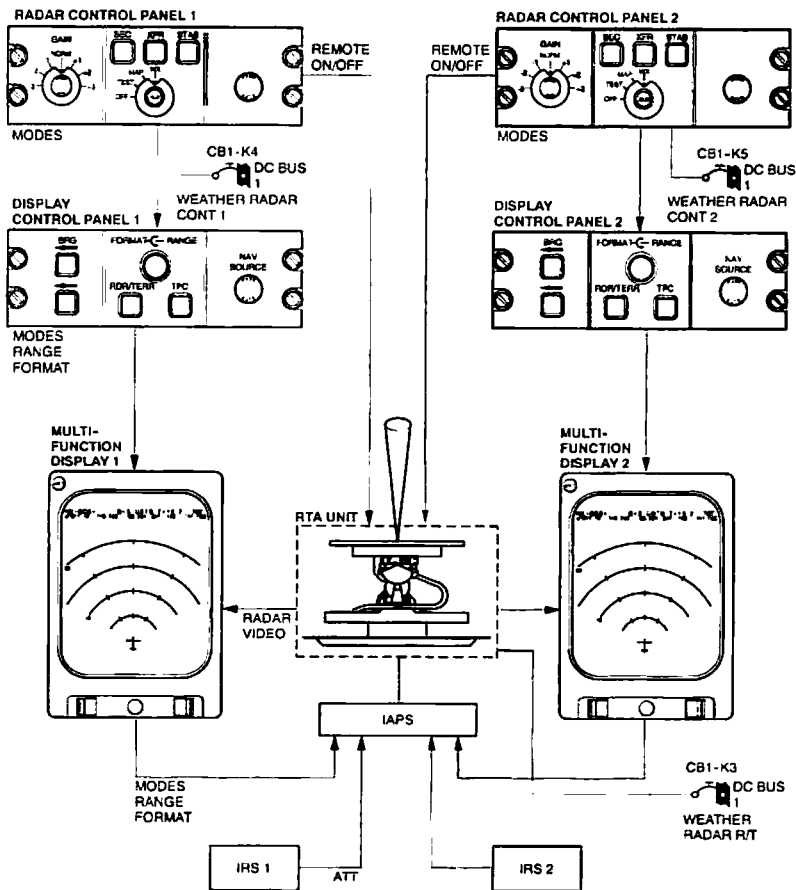


Weather Radar System <0025><0028><0040>
Figure 18-90-1

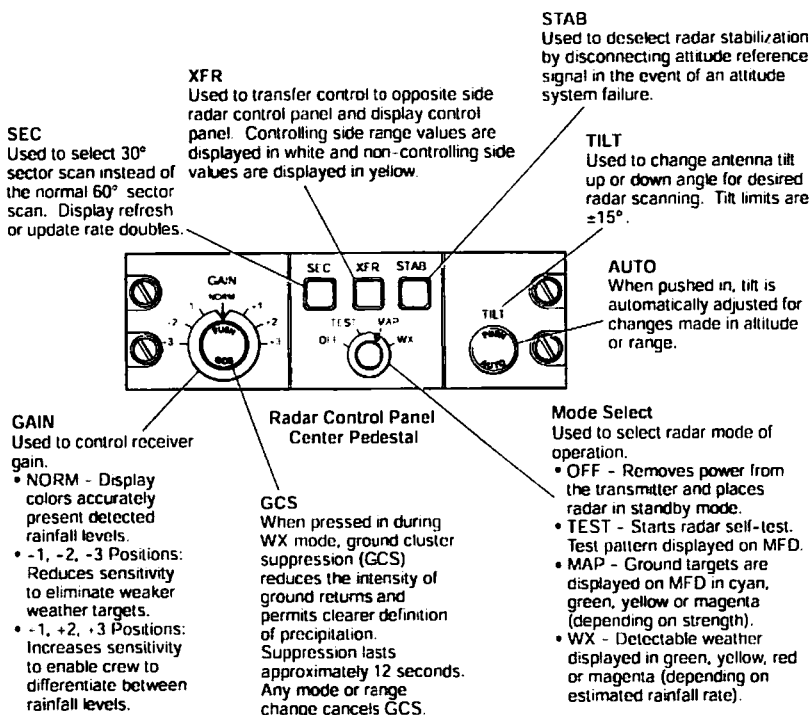

Weather Radar System Control Panel <0028>
Figure 18-90-2

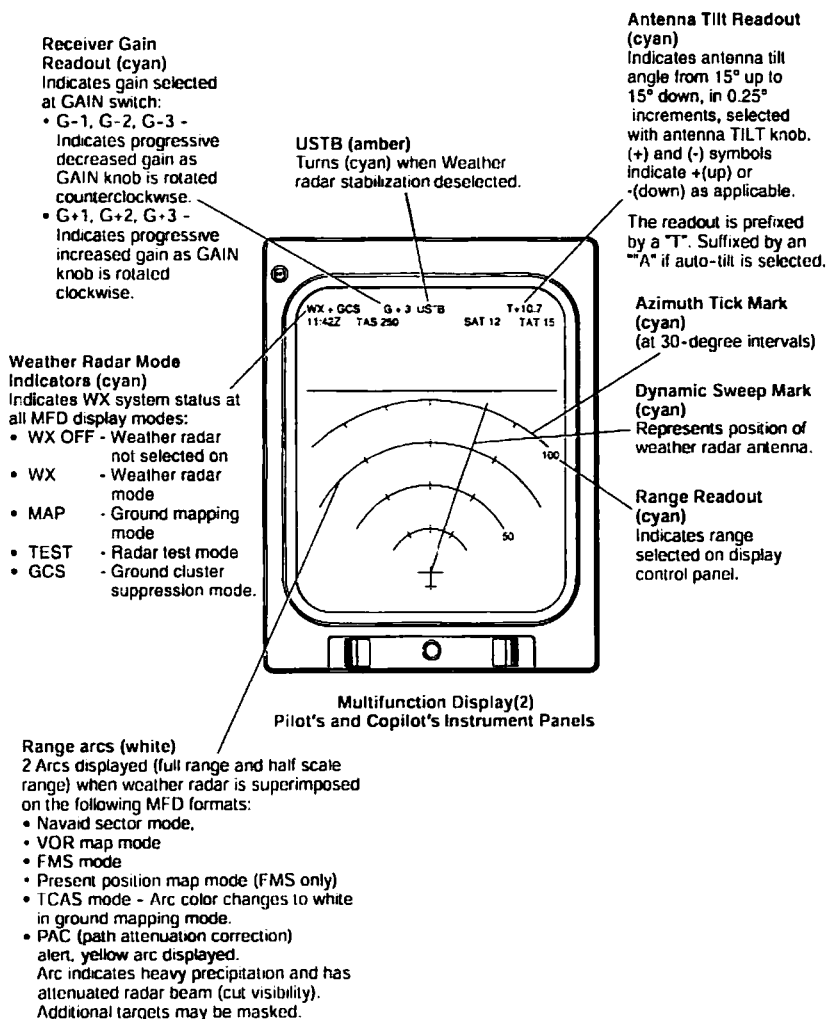

Weather Radar System – MFD Indications <0024>
Figure 18-90-3


	NAVIGATION SYSTEMS Weather Radar System	Vol. 1	18-90-5
		REV 56, Jan 31/03	


The colors used on the radar display to represent rainfall intensity are as follows:

DISPLAY COLOR	RAINFALL RATE INCHES/HR (MM/HR)	VIDEO INTEGRATED PROCESSOR (VIP) CATEGORIZATIONS		
		STORM CATEGORY	VIP LEVEL	RAINFALL RATE INCHES/HR (MM/HR)
MAGENTA	> 2.1 (> 52)	EXTREME	6	> 5.0 (> 125)
		INTENSE	5	2.0 – 5.0 (50 – 125)
RED	0.5 – 2.1 (12 – 52)	VERY STRONG	4	1 – 2 (25 – 50)
		STRONG	3	0.5 – 1 (12 – 25)
YELLOW	0.17 – 0.5 (4 – 12)	MODERATE	2	0.1 – 0.5 (2.5 – 12)
GREEN	0.04 – 0.17 (1 – 4)	WEAK	1	0.01 – 0.1 (0.25 – 2.5)
BLACK	< 0.04 (< 1)			

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

Weather Radar System - MFD Indications <0028>
Figure 18-90-4

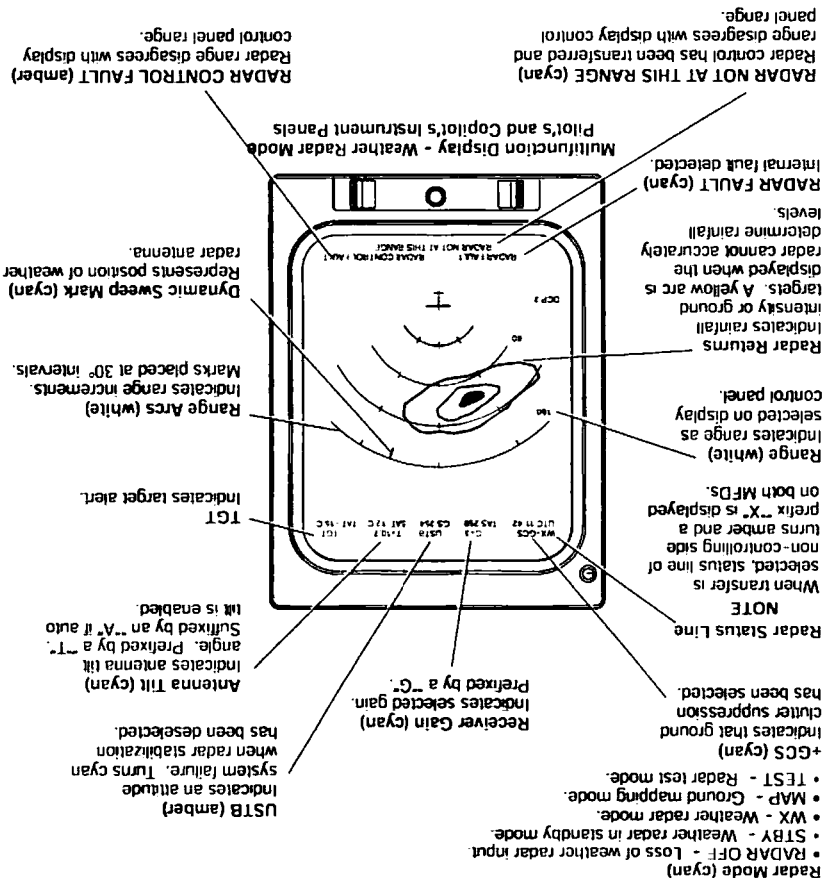


	NAVIGATION SYSTEMS Weather Radar System	Vol. 1	18-90-7
		REV 56, Jan 31/03	

A. System Circuit Breakers

SYSTEM	SUB-SYSTEM	CB NAME	BUS BAR	CB PANEL	CB LOCATION	NOTES
Weather Radar	Receiver / Transmitter	WEATHER RDR R/T	DC BUS 1	1	K3	
	Control Panel	WEATHER RDR CONT 1			K4	
		WEATHER RDR CONT 2			K5	<0028>

	Flight Crew Operating Manual CSP A-013-008	
--	---	--

	NAVIGATION SYSTEMS Weather Radar System	Vol. 1	18-90-8
		REV 56, Jan 31/03	

THIS PAGE INTENTIONALLY LEFT BLANK

	Flight Crew Operating Manual CSP A-013-008	
--	---	--